


SPADE TERMINALS

- Material
- Insulation: Vinyl
- Terminal Body: Copper
- Plating: Tin

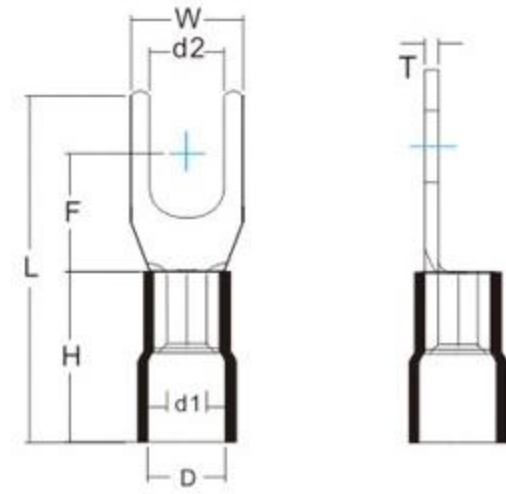

ITEM NO.	STUD SIZE		DIMENSIONS								COLOR	EXPLANATION		
	Metric	American	d2	W	F	L	H	d1	D	T				
SV1.25-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	1.7	4.2	0.8	RED	PVC 75°C Wire range : 0.5-1.5mm ² A.W.G.:(22-16) Max.current=19A		
SV1.25-3.7S	3.5	#6	3.7											
SV1.25-3.7L	3.5	#6	3.7	6.4										
SV1.25-3.7LL	3.5	#6	3.7	7.2										
SV1.25-4S	4	#8	4.3	6.4										
SV1.25-4M	4	#8	4.3	7.2										
SV1.25-4L	4	#8	4.3	8.1										
SV1.25-5S	5	#10	5.3	9.5										
SV1.25-5L	5	#10	5.3											
SV1.25-6S	6	1/4"	6.5	12.0									11.0	27.2
SV1.25-6L	6	1/4"	6.5											
SV1.25-8	8	5/16"	8.5		13.5	11.5	26.7							
SV2-3.2	3	#4	3.2	5.7	6.5	21.2	10.0	2.3	4.7	0.8	BLUE	PVC 75°C Wire range : 1.5-2.5mm ² A.W.G.:(16-24) Max.current=27A		
SV2-3.7S	3.5	#6	3.7											
SV2-3.7L	3.5	#6	3.7	6.0										
SV2-3.7LL	3.5	#6	3.7	7.2										
SV2-4S	4	#8	4.3	6.4										
SV2-4M	4	#8	4.3	7.2										
SV2-4L	4	#8	4.3	8.1										
SV2-5S	5	#10	5.3	9.5										
SV2-5L	5	#10	5.3											
SV2-6S	6	1/4"	6.5	12.0									11.0	27.2
SV2-6L	6	1/4"	6.5											
SV2-8	8	5/16"	8.5		13.5	11.5	27.0							
SV3.5-3.7	3.5	#6	3.7	8.0	7.7	25.3	13.0	2.9	6.2	1.0	BLACK	PVC 75°C Wire range : 2.5-4mm ² A.W.G.:(14-12) Max.current=37A		
SV3.5-4	4	#8	4.3											
SV3.5-5	5	#10	5.3											
SV3.5-6	6	1/4"	6.5	12.0									9.1	28.5
SV3.5-8	8	5/16"	8.5	14.0									11.5	30.7
SV3.5-10	10	3/8"	10.5	17.5	12.5	33.5								
SV5.5-3.7S	3.5	#6	3.7	7.2	7.5	24.4	13.0	3.4	6.5	1.0	YELLOW	PVC 75°C Wire range : 4-6mm ² A.W.G.:(12-10) Max.current=48A		
SV5.5-3.5	3.5	#6	3.7	8.3	7.0	25.5								
SV5.5-4SS	4	#8	4.3	7.2	7.5	24.4								
SV5.5-4S	4	#8	4.3	8.3	9.0	25.5								
SV5.5-4L	4	#8	4.3											
SV5.5-5	5	#10	5.3	12.0	12.0	31.7								
SV5.5-6S	6	1/4"	6.5											
SV5.5-6L	6	1/4"	6.5											
SV5.5-8	8	5/16"	8.5	14.0	11.5	30.7								
SV5.5-10	10	3/8"	10.5	17.5	12.5	33.5								