

BpS06-750-33

Terminal Pad Materials:
Tin-plated Nickel-Copper

Lead-Free, RoHS Compliant

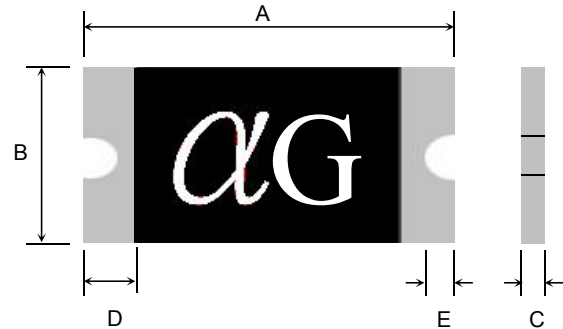


TABLE I. DIMENSIONS:

Model	Marking	A		B		C		D	E
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
BpS06-750-33	αG	3.00	3.50	1.50	1.80	0.80	1.80	0.15	0.10

Unit:mm

TABLE II. PERFORMANCE RATINGS:

Model	Marking	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	R _{i_min} (Ω)	R _{1_max} (Ω)
BpS06-750-33	αG	33.0	100	0.75	1.50	0.6	8.0	0.20	0.090	0.500

Order Information

SMD1206	075 -33V	
Product name	Hold	Max
Size 3216 mm / 1206 mils	Current	voltage
SMD: surface mount device	0.75A	