Fuseholder Open Design, 5 x 20 mm, THT, Cover



600 V  $\cdot$  10 A (UL/CSA)

#### Description

- Optional covers, see accessories

### See below: Approvals and Compliances

### References

We recommend for new applications the type OGN

## Weblinks

pdf data sheet, html datasheet, General Product Information, Packaging details, Distributor-Stock-Check, Accessories, Detailed request for product, Microsite

### **Technical Data**

Fuse-Link	5 x 20 mm
Mounting	PCB
Attachment	Screw, rivet or THT
Terminal	Solder THT
Rated Voltage	600V
Rated current	10A (UL/CSA)
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, black, UL 94V-0
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight	2.9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Rated Voltage, Rated current, Certifica-
	tion marks

Soldering Methods	Wave
- -	Soldering Profile
Solderability	245 °C / 3 sec acc. to IEC 60068-2-20,
	Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20,
	Test Tb, method 1A
Contact Resistance	< 10 mΩ at 100 mA
Insulation Resistance	> $10 M\Omega$ between life parts
	(500 VDC: 1 min)

### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: OG (Holder) 5x20

Approval Logo Certificates		Certification Body	Description
c <b>FL</b> <sup>°</sup> us	UL Approvals	UL	UL File Number: E39328
Product standa Product standards	r <b>ds</b> s that are referenced		
Organization	Design	Standard	Description
(YL)	Designed according to	UL 4248-1	Fuseholder general requirements
CSA Group	Designed according to	CSA C22.2 no. 4248.1	Fuseholder general requirements

# OG (Holder) 5x20

# Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
I <u>EC</u>	Designed for applications acc.	IEC/UL 62368-1	IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.


# Compliances

The product complies with following Guide Lines

	<b>J</b>		
Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
<b>(</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

## Dimension [mm]

\_\_\_\_\_ 29 mm

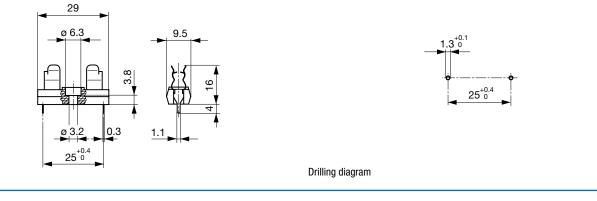

# All Variants

Holder	Order Number	
•	0031.8001	
	l products can be	
	me:https://www. n/Stock-Check/Sto TER	ock-

|--|--|

### Accessories

Description



Cover OG, UHB, UH Cover for Holder OG (Clip) 5x20, OG (Halter) 5x20, UH, UHB

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.