


DC/DC Converter

K78(L)xx-3AR3 Series

MORNSUN®

Wide input voltage non-isolated and regulated single output

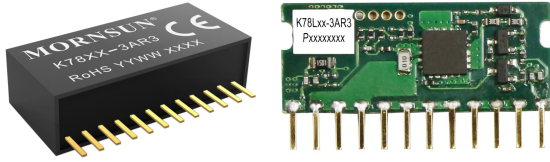

CE RoHS

K78(L)xx-3AR3 series are high efficiency switching regulators. The converters feature high efficiency, low loss, short circuit protection, and there is no need for a heat sink. These products are widely used in applications such as industrial control, instrumentation and electric power.

FEATURES

- High efficiency up to 97%
- No-load input current as low as 2mA
- Operating ambient temperature range: -40°C to +85°C
- Output short-circuit protection
- EN62368 approved

Selection Guide

Certification	Part No.	Input Voltage (VDC)*	Output		Full Load Efficiency (%) Typ. Vin Min. / Vin Max.	Capacitive Load (µF) Max.
		Nominal (Range)	Voltage (VDC)	Current (mA)		
CE	K78(L)03-3AR3	24 (8-36)	3.3	3000	90/83	1000
	K78(L)05-3AR3	24 (8-36)	5	3000	93/89	680
	K78(L)X6-3AR3	24 (10-36)	6.5	3000	94/90	330
	K78(L)09-3AR3	24 (13-36)	9	3000	95/91	330
	K78(L)12-3AR3	24 (16-36)	12	3000	97/93	330
	K78(L)15-3AR3	24 (19-36)	15	3000	97/94	330

Note: * For input voltages exceeding 30 VDC, an input capacitor of 22µF/50V is required.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
No-load Input Current		--	2	4	mA
Reverse Polarity at Input		Avoid / Not protected			
Input Filter		Capacitance filter			
Ctrl*	Module on	Ctrl pin open or pulled high (TTL 4.5-14VDC)			
	Module off	Ctrl pin pulled low to GND (0-0.8VDC)			
	Input current when off	--	--	4	mA

Note: * The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	0%-100% load, input voltage range	--	±2	±3	%
Linear Regulation	Full load, input voltage range	--	±0.5	±1	
Load Regulation	Nominal input voltage, 10% -100% load	--	±0.5	±1	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.01.29-A/2

Page 1 of 6

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Ripple & Noise*	20MHz bandwidth, nominal input voltage, 100% load	3.3V/5V/6.5V/9V output	--	40	70	mVp-p
		12V/15V output	--	50	100	
Temperature Coefficient	Operating ambient temperature -40°C to +85°C		--	--	±0.03	%/°C
Transient Response Deviation	Nominal input voltage, 50% load step change	3.3V output	--	--	5	%Vo
		5V/6.5V output	--	--	4	
		9V/12V output	--	--	3	
		15V output	--	--	2	
Transient Recovery Time	Nominal input voltage, 50% load step change		--	0.1	0.2	ms
Short-circuit Protection	Nominal input voltage		Continuous, self-recovery			
Note: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information;						

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Pin Soldering Resistance Temperature	Soldering time: 10s	--	--	+260	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency*	PWM mode	100	250	400	kHz
MTBF	MIL-HDBK-217F@25°C	2000	--	--	k hours
Note: * Different switching frequencies of different output voltages.					

Mechanical Specifications

Case Material	K78xx-3AR3 Series	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
	K78Lxx-3AR3 Series	Open frame
Dimensions	K78xx-3AR3 Series	32.15 x 14.85 x 9.05 mm
	K78Lxx-3AR3 Series	30.60 x 12.50 x 5.80mm
Weight	K78xx-3AR3 Series	9.3g(Typ.)
	K78Lxx-3AR3 Series	4.0g(Typ.)
Cooling Method	Free air convection	

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 3 for recommended circuit)
	RE	CISPR32/EN55032	CLASS B (see Fig. 3 for recommended circuit)
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6kV perf. Criteria B
	RS	IEC/EN 61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN 61000-4-4	±1kV (see Fig. 3 for recommended circuit) perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line ±1kV (see Fig. 3 for recommended circuit) perf. Criteria B
	CS	IEC/EN 61000-4-6	3Vr.m.s perf. Criteria A

Typical Characteristic Curves

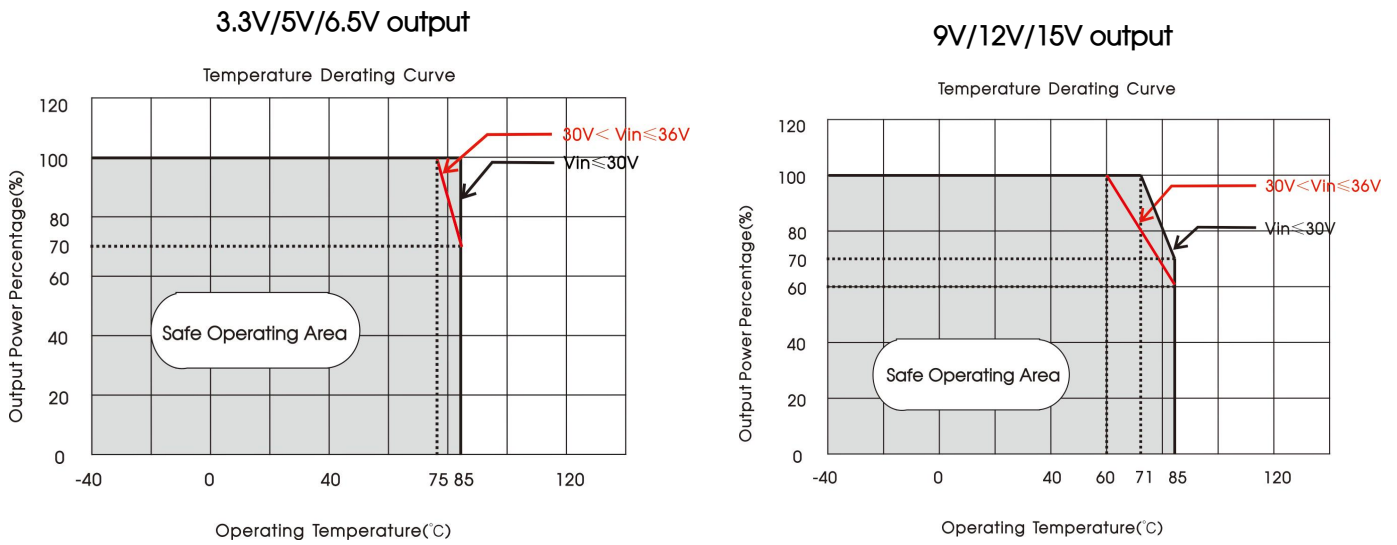


Fig. 1

Design Reference

1. Typical application

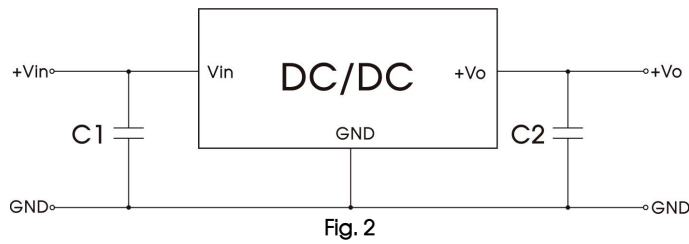


Fig. 2

Table 1

Part No.	C1 (ceramic capacitor)	C2 (ceramic capacitor)
K78(L)03-3AR3	10μF/50V	22μF/10V
K78(L)05-3AR3		22μF/10V
K78(L)X6-3AR3		22μF/10V
K78(L)09-3AR3		22μF/16V
K78(L)12-3AR3		22μF/25V
K78(L)15-3AR3		22μF/25V

Notes:

1. The required capacitors C1 and C2 must be connected as close as possible to the terminals of the module;
2. Refer to Table 1 for C1 and C2 capacitor values. For certain applications, increased values and/or tantalum or low ESR electrolytic capacitors may also be used instead;
3. Converter cannot be used for hot swap and with output in parallel

2. EMC compliance circuit

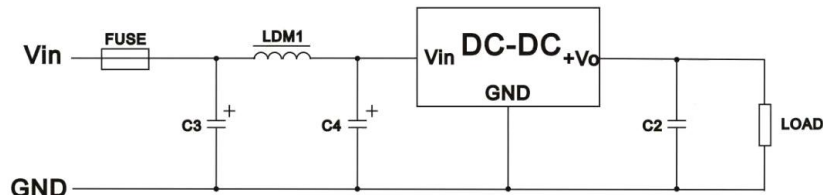


Fig.3 EMC compliance circuit

	FUSE	C3	LDM1	C4	C2
Emissions	Select fuse value according to actual input current	100μF /50V	22μH	100μF /50V	Refer to the C2 in Fig. 2
Immunity				680μF /50V	

3. Trim function for output voltage adjustment

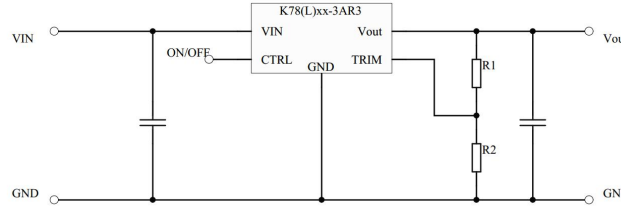




Fig. 4 TRIM resistor connection
Table 2

Vout nom.	3.3VDC		5.0VDC		6.5VDC		9.0VDC		12VDC		15VDC	
Vout adj.	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2
3	500k											
3.3												
4		95k	195k									
4.5		52k	470k									
5												
5.5				125k	330k							
6				58k	750k							
6.5												
7						140k	220k					
8						40k	520k					
9												
10								65k	530k			
11								28k	1180k			
12												
13									110k	590k		
14									50k	1290k		
15												
16												90k
17												40k


4. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout(K78xx-3AR3 Series)

THIRD ANGLE PROJECTION 

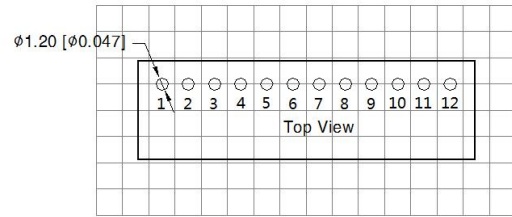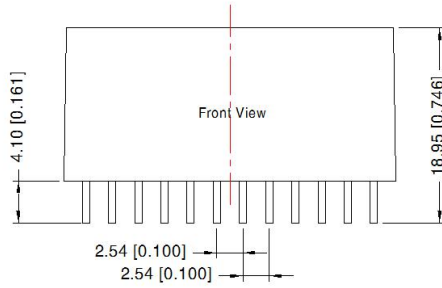

Note: Grid 2.54*2.54mm


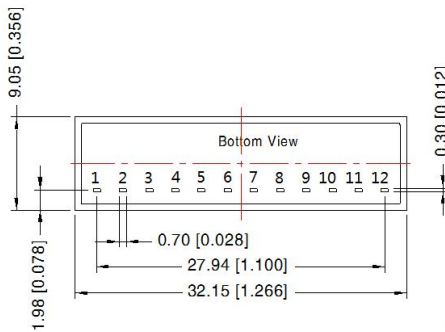


Pin-Out	
Pin	Mark
1	Ctrl
2,3,4	Vin
5,6,7,8	GND
9,10	+Vo
11	+Vo
12	Trim


Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

Dimensions and Recommended Layout(K78Lxx-3AR3 Series)

THIRD ANGLE PROJECTION 

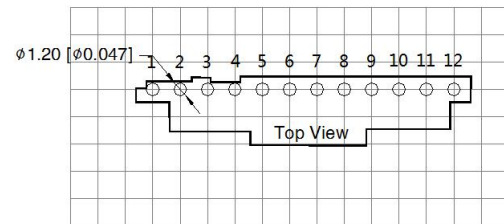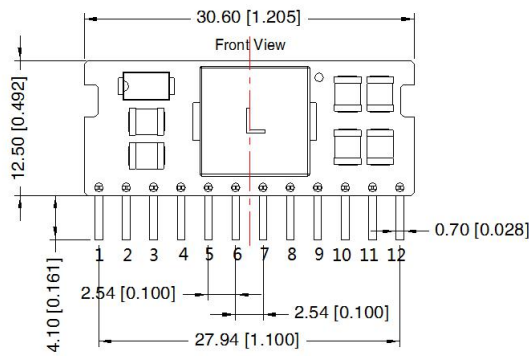

Note: Grid 2.54*2.54mm

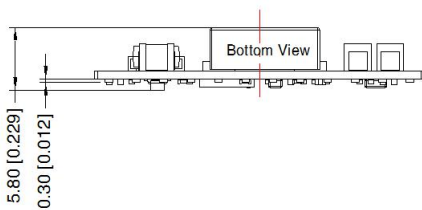

Pin-Out	
Pin	Mark
1	Ctrl
2,3,4	Vin
5,6,7,8	GND
9,10	+Vo
11	+Vo
12	Trim

Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10[\pm 0.004]$
General tolerances: $\pm 0.50[\pm 0.020]$

Notes:

1. For additional information on Product Packaging please refer to: www.mornsun-power.com. Packaging bag number: 58210075(K78xx-3AR3), 58210132(K78Lxx-3AR3);
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on company corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com