

普通塑封整流二极管

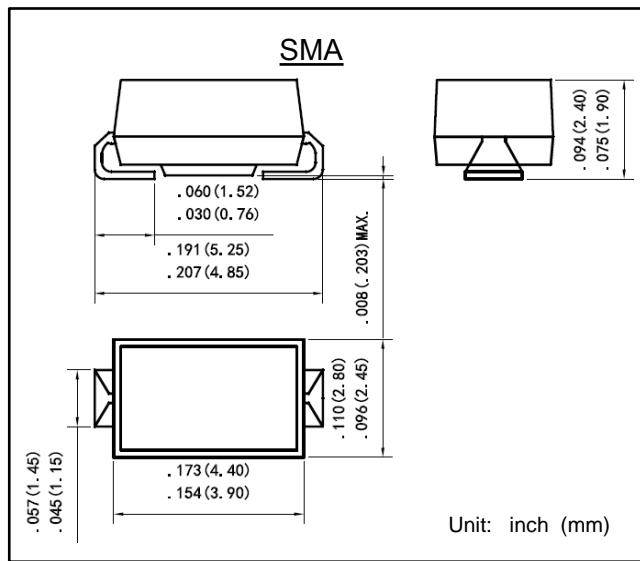
反向电压 2000 V

正向电流 1.0 A

General-purpose Plastic Rectifiers

Reverse Voltage 2000 V

Forward Current 1.0 A

**最大值和特性** TA = 25°C 除非另有规定。

Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	S1Y	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	2000	V
最大均方根电压 Maximum RMS voltage	V _{RMS}	1400	V
最大直流阻断电压 Maximum DC blocking voltage	V _{DC}	2000	V
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	1.0	A
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	I _{FSM}	30	A
最大正向电压 @IF=1.0A Maximum forward voltage	V _F	2.2	V
最大反向电流 @V _{DC} T _J = 25°C Maximum reverse current T _J = 100°C	I _R	5 300	μA
典型热阻 Typical thermal resistance (Note 1)	R _{θJA}	65	°C/W
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	C _J	35	pF
工作结温 Operating junction temperature rang	T _J	-55 --- +125	°C
存储温度 Storage temperature rang	T _{STG}	-55 --- +150	°C

备注 Note:

1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上 , 从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

特性曲线 Characteristic Curves

