

贴片型编带规格(适用标准JIS C 0806-3)

VCHIP TYPE TAPING SPECIFICATIONS (Applicable standard JIS C 0806-3)

1. 编带 Taping

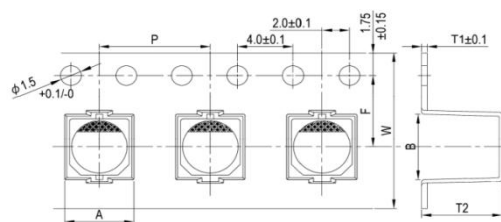


图1-1

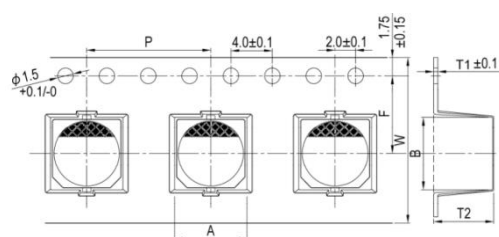


图1-2

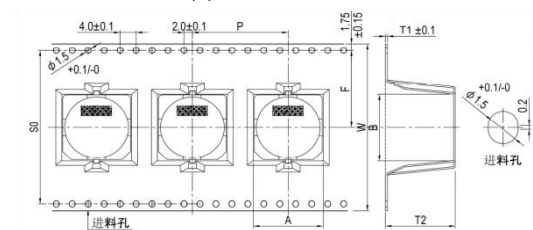


图1-3

单位Unit : mm

型别 Type	φD × L	A	B	F	P	T1	T2	W	S0	图号 Figure	
高分子固态 Conductive Polymer Aluminium Solid Capacitors	5 × 6.0	5.7	5.7	5.5	12	0.4	6.7	12.0	---	1-2	
	6.3 × 5.4	7.0	7.0	7.5		0.4	5.9	16.0			
	6.3 × 6.0						6.7				
	6.3 × 7.7						8.3				
	8 × 9	8.7	8.7	11.5	16	0.4	10.0	24.0			
	8 × 10.2					9.2					
	8 × 12					0.5	12.5				
	10 × 10.2					0.4	11.0				
10 × 12.5	10.7	10.7	0.5			13.0					
液态品/ 固液混合品 Aluminum Electrolytic Capacitors/ Conductive Polymer Hybrid Capacitors	4 × 5.4	4.7	4.7	5.5	8	0.4	5.8	12.0	---	1-1	
	4 × 6.0					6.2					
	5 × 5.4	5.7	5.7		12	0.4	5.8				16.0
	5 × 6.0					6.7					
	6.3 × 5.4	7.0	7.0	7.5		0.4	5.9	24.0			
	6.3 × 6.0						6.7				
	6.3 × 7.7				8.2						
	6.3 × 8.7				9.3						
	6.3 × 10	6.8	6.8		0.5	10.5					
	8 × 6.2	8.7	8.7	7.5	12	0.4	6.9	16.0			
	8 × 8	8.7	8.7	11.5	16	0.4	8.8	24.0			
	8 × 9						10.0				
	8 × 10.2					10.7	10.7			0.5	11.0
	8 × 12										12.5
	10 × 10.2	0.4	11.0								
	10 × 12.5	0.5	13.1								
	10 × 16.5		17.0								
	12.5 × 13.5	13.4	13.7	14.2	24	0.5	14.5	32.0		28.4	
	12.5 × 16						17.5				
	12.5 × 21						21.5				
	16 × 16.5	17.5	17.5		20.2	28	0.5	17.0		44.0	40.4
	16 × 20							20.5			
	16 × 21.5							22.2			
	18 × 16.5						0.5	17.5			
	18 × 21.5	32	22.5								
	尺寸公差 Dimensional tolerances	± 0.2	± 0.2	± 0.1	± 0.1	± 0.1	± 0.2	± 0.3		± 0.1	---

贴片型编带规格 VCHIP TYPE TAPING SPECIFICATIONS

2. 卷轴包装 Reel Packaging

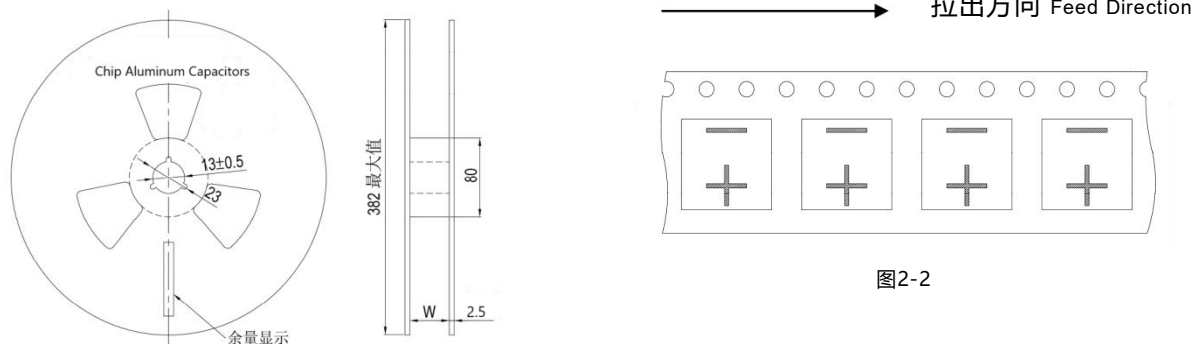


图2-1

图2-2

单位Unit: mm

产品尺寸 Size	$\Phi 4 \sim \Phi 5$	$\Phi 5 \times 6L, \Phi 6.3, \Phi 8 \times 6.4$	$\Phi 8 \times 8L \sim \Phi 10$	$\Phi 12.5$	$\Phi 16 \sim \Phi 18$
W	14	18	26	34	46

3. 包装规格表 Packaging Specifications

编带卷轴 Reel

单位Unit: mm

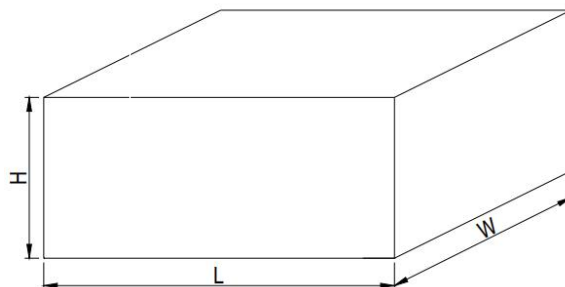


图3-1

制品尺寸Size	$\Phi 4 \sim \Phi 5$	$\Phi 6.3, \Phi 8 \times 6.4$	$\Phi 8 \times 8L \sim \Phi 10$	$\Phi 12.5$	$\Phi 16 \sim \Phi 18$
H	200	235	200	200	235
W, L	400				