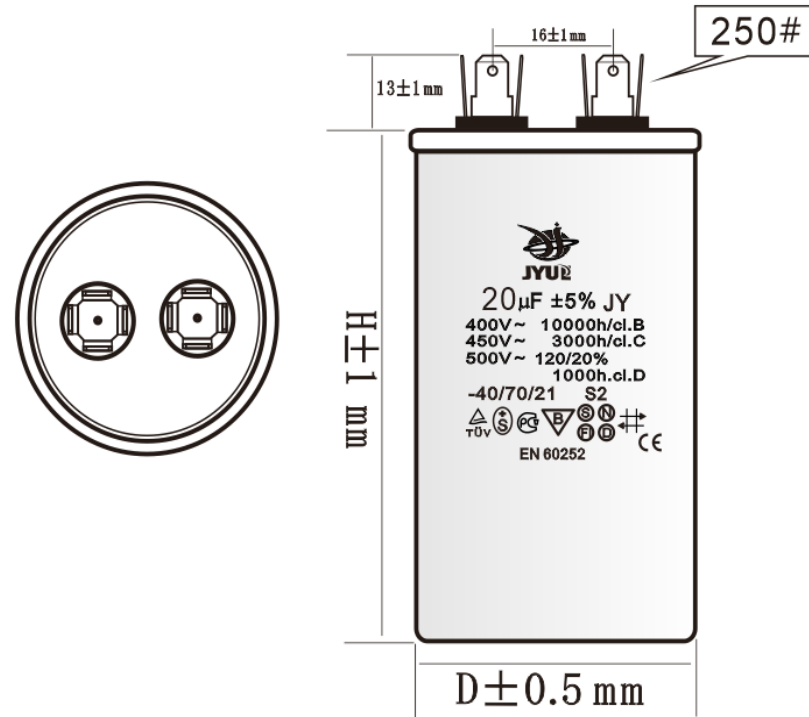


Customer ' s name					Customer recognizes:	
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension	Remark		
1	450VAC 50/60Hz	10μF±5%	40×60	A1		
2	450VAC 50/60Hz	12.5μF±5%	40×60			
3	450VAC 50/60Hz	15μF±5%	40×75			
4	450VAC 50/60Hz	20μF±5%	40×75			
5	450VAC 50/60Hz	25μF±5%	45×75			
Carry out standard		GB/T3667.1-2016/IEC60252-1: 2013				
Operating temp range		(-40~+70℃)	Lifespan garden	C CLASS		
Withstanding standard		Between terminals	2.0Un			
		Terminals to case	2.5KVC/2S			
		safety class	S2			
Capacitance tolerance		±5%				
Loss angle tangent		≤ 0.0030 (1000 HZ)				
	Shape	See right picture				
	Condenser fuse	Have self-healing				
	Case	ALUMINIUM CASE			Drafts system:	
	Terminals	4+4 PINS			Name: CBB65 metallized polypropylene film capacitor.	
	Filling	Special wax			Approval	
					Wenling jiyang capacitor co.,LTD	