


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC36V/2A.
- 2.Mechanical Life: $\geq 1,000,000$ cycles.
- 3.Electrical Life: $\geq 200,000$ cycles(DC 36V); $\geq 50,000$ cycles(AC 220V).
- 4.Contact Resistance: ≤ 50 m Ω .
- 5.Insulation Resistance: $\geq 1,000$ M Ω .
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25 $^{\circ}$ C ~ +55 $^{\circ}$ C(No Freezing).
- 8.Operating Force: About 4N.
- 9.Operating Travel: About 2mm.
- 10.Torque: About 0.6Nm max.applied to nut.
- 11.Protection degree: IP65;IK08.
- 12.Terminal Type: Screw Terminal.

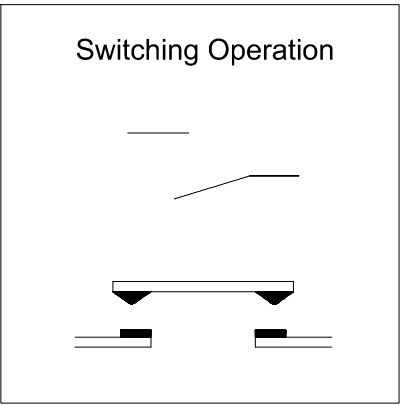

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: \odot .
- 3.Body: \odot .
- 4.Base: PBT.

PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Seal Ring

Part Number: GQ16H-10/◎

"◎"	Crust Material
N	Nickel Plated Brass
S	Stainless Steel
A	Al alloy(black)
G	Gold Plated Brass

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	用途 审核 CH 2020/04/15	APPD 审核 CH 2020/04/15	FINISH 处理 NCH 2020/04/15
DIMENSIONS 0.00 TO 18.00mm ± 0.43 mm 18.01 TO 30.00mm ± 0.52 mm 30.01 TO 50.00mm ± 0.62 mm 50.01 TO 80.00mm ± 0.74 mm	TOLERANCE ± 0.43 mm ± 0.52 mm ± 0.62 mm ± 0.74 mm	SCALE 比例 1.8 / 1	UNIT 单位 mm	DR. 制图 ZPD 2020/04/15
TITLE 名称 GQ Series Anti-vandal push button	DWG NO. 图号 GQ16H-10			SIZE 图纸 A4
FILE NAME 档案名称 GQ16-10.DWG	SHEET 张 1 / 1	REV. 更改 1		