




SWITCH FUNCTION	
POS.1	POS.2
ON	ON
C - NC	C - NO
(ON)=MOMENTARY	



PANEL CUTOUT
MAX.PANEL THICKNESS
10 mm

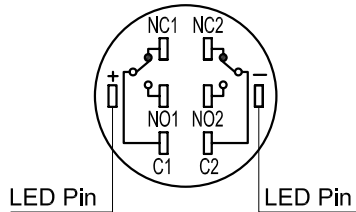

Contact Composition



Seal Ring

REV. 更改	DESCRIPTION 说明	ENG. 修改人	APPROVE 审核

SPECIFICATIONS:

- 1.Max.Switch Rating: Ith:5A Ui: 250VAC.
- 2.Rating: 0.5A 250VAC.
- 3.Electrical Life: ≥50,000cycles.
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 2,000VAC.
- 7.Operating Temperature: -25℃ ~ +55℃.
- 8.IP Class: IP67.
- 9.Operating Force: 3~5N.
- 10.Torque: 2Nm max.applied to nut.

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: Stainless Steel/Al alloy(Black).
- 3.Body: Stainless Steel/Al alloy(Black).
- 4.Base: PBT.

Part Number: LAS1-AGQ-□■/◎

"□"	Contact structure	"■"	Operation mode	"◎"	Crust material
11	1NO 1NC	No Letter	Momentary	S	Stainless steel
22	2NO 2NC	Z	Latching type	A	Al alloy(black)

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 ↑	±0.40mm

中国·红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

USED 用途	APPD 审核	CH 2013/12/17
FINISH 处理	CHKD 校对	NCH 2013/12/17
SCALE 比例	UNIT 单位	DR. 制图
1.2 / 1	mm	WWX 2013/12/17
TITLE 名称	Anti-vandal metal push button	

MATERIAL	DWG NO. 图号	LAS1-AGQ - □ ■ / ◎	SIZE 图纸	A4
FILE NAME 档案名称	LAS1AGQ001.DWG	SHEET 张	1 / 1	REV. 更改
				1