
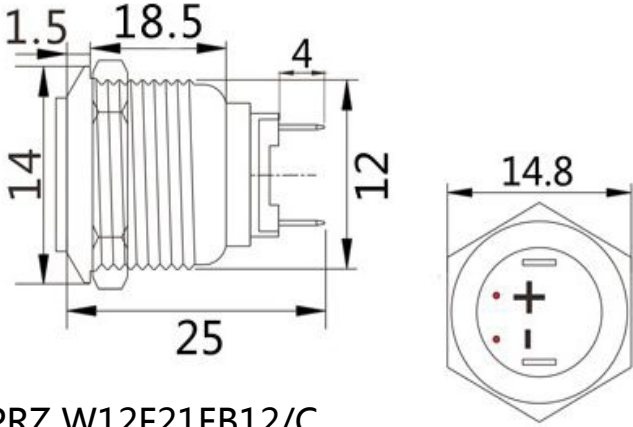


Photo		Drawing	
		 <p>PRZ W12F21EB12/C PRZ W12F21EG12/C PRZ W12F21ER12/C PRZ W12F21ER12/C.</p>	
Specification			
尾部配置	Tail Configuration	Terminal	
绝缘强度	Dielectric Intensity	2000VAC	
环境温度	Ambient Temperature	-20 °C~+55 °C	
面板厚度	Panel Thickness	1~10mm	
螺母扭矩	Nut Torque	5~14Nm	
防护等级	Protection Level	IP65,IK08	
开关规格	Switch Specification	3A/250VAC	
安装孔径	Mounting Hole	12mm	
头部形状	Head Type	Flat head	
操作行程	Operation Stroke	About 2.5mm	
机械寿命	Mechanical life	more than 500,000 cycles	
电器寿命	Electrical life	more than 50,000 cycles	
功能	Function	1NO latching	
材料 Material	触点	Contact	Silver alloy
	按钮	Enclosure	Copper
	基座	Base	PA66
LED 灯珠参数	灯珠类型	LED type	non-polar LED
	额定电压	Rated voltage	3~380v
	额定电流	Rated current	20mA
	灯珠颜色	LED color	Red,Green,Blue,Amber,White
	灯珠寿命	LED life	more than 60,000 hours