
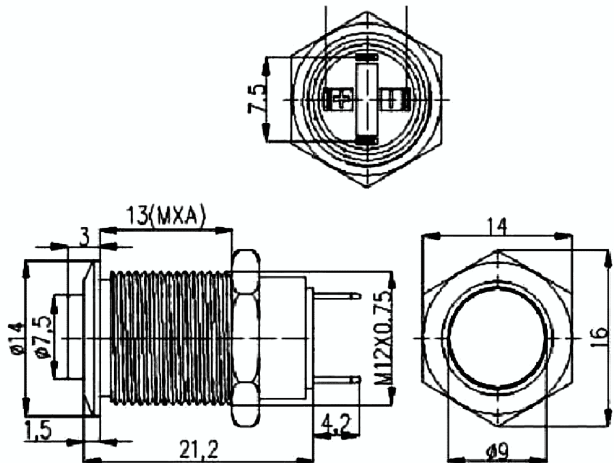


Photo		Drawing	
		<p>Dimensions in mm</p> 	
Specification		PRZ W12H21/C.	
	Tail Configuration	Terminal	
	Dielectric Intensity	2000VAC	
	Ambient Temperature	-20 °C~+55 °C	
	Panel Thickness	1~10mm	
	Nut Torque	5~14Nm	
	Protection Level	IP65,IK08	
	Switch Specification	1A/250VAC	
	Mounting Hole	12mm	
	Head Type	High Flat	
	Operation Stroke	About 2.5mm	
	Mechanical life	more than 500,000 cycles	
	Electrical life	more than 50,000 cycles	
	Function	1NO Latching	
Material		Contact	Silver alloy
		Enclosure	Copper
		Base	PA66
LED		LED type	/
		Rated voltage	/
		Rated current	/
		LED color	/
		LED life	/