


Physical display


Dimensions and installation dimensions




Diameter: Ø40mm
 Shape: flat round
 Configuration: 1NO1NC/2NO2NC
 Operation type: momentary
 Crust material: stainless steel
 Switch Rating: 4A/AC220V
 Contact material: silver
 Connection mode: pin terminal
 Switch Rating: IP67 Ik10

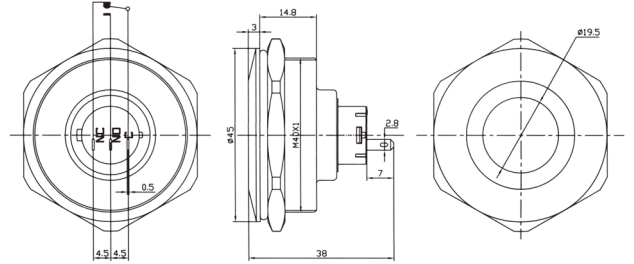

Diameter: Ø40mm
 Shape: flat round
 Configuration: 1NO1NC/2NO2NC
 Operation type: momentary
 Luminous color: RGBYWOPRRB
 Luminous voltage: 3V 5V 6V 12V 24V 36V 48V AC 110V AC220V
 Crust material: stainless steel
 Switch Rating: 4A/AC220V
 Contact material: silver
 Connection mode: pin terminal
 Switch Rating: IP67 Ik10

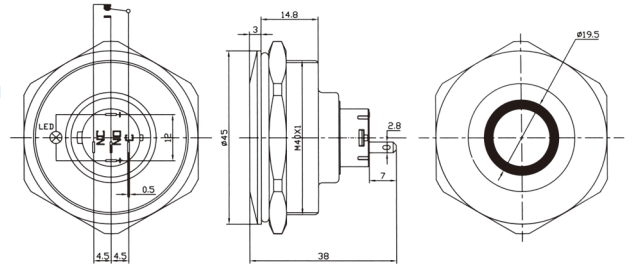

Diameter: Ø40mm
 Shape: flat round
 Configuration: 1NO1NC/2NO2NC
 Operation type: momentary
 Luminous color: RGBYWOPRRB
 Luminous voltage: 3V 5V 6V 12V 24V 36V 48V AC 110V AC220V
 Crust material: stainless steel
 Switch Rating: 4A/AC220V
 Contact material: silver
 Connection mode: pin terminal
 Switch Rating: IP67 Ik10

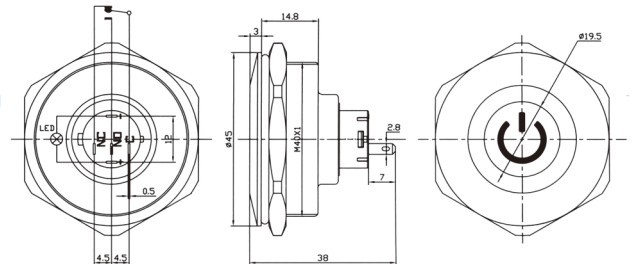

Diameter: Ø40mm
 Shape: flat round
 Configuration: 1NO1NC/2NO2NC
 Operation type: momentary
 Luminous color: RGBYWOPRRB
 Luminous voltage: 3V 5V 6V 12V 24V 36V 48V AC 110V AC220V
 Crust material: stainless steel
 Switch Rating: 4A/AC220V
 Contact material: silver
 Connection mode: pin terminal
 Switch Rating: IP67 Ik10

