


1. SCOPE

This specification is applied to the ceramics resonator used for communication.

2. PART NO.

PART NUMBER	Mode
WTL6R12062	ZTB455E

3. Dimensions

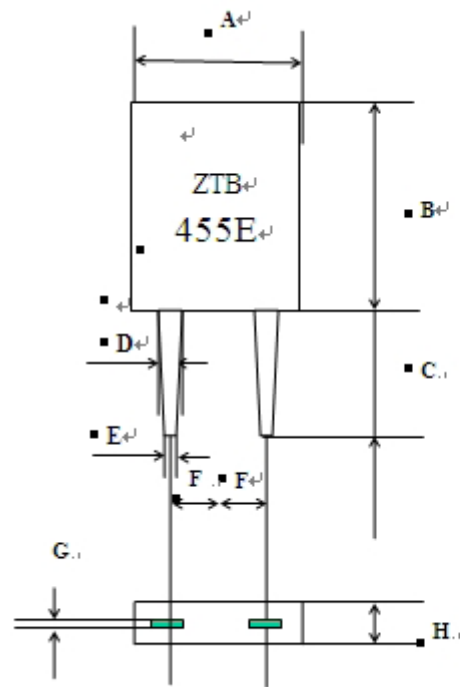


UNIT : MM^μ

A	7.0 ± 0.3 ^μ
B	9.0 ± 0.3 ^μ
C	6.0 ± 0.5 ^μ
D	0.9 ± 0.1 ^μ
E	0.7 ± 0.1 ^μ
F	2.5 ± 0.2 ^μ
G	0.15 ± 0.03 ^μ
H	3.0 ± 0.3 ^μ

4. TEST CIRCUIT

Parts shall be measured under a condition (Temp.:3~35°C. Hum.:45~85%) unless any necessity to measure under a standard condition (Temp.:20 + 2°C. Humic.:65 + 5%) is occurred.

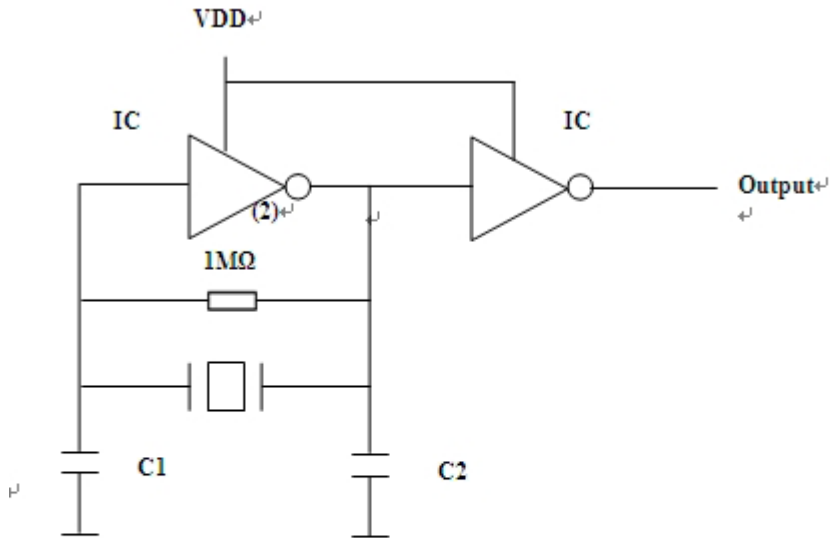

C1.C2=100PF

IC= 1/6CD4069UBE+

VDD=+5V

P/N: WTL6R12062

Ceramic resonator ZTB



5. ELECTRICAL CHARACTERISTICS

	Item	Requirements
5-1	Center Frequency (fo)	455KHZ
5-2	Frequency Accuracy	Fc±2KHZ
5-3	Resonator Impedance	20Ω max
5-4	Operating Temperature Range	-20 TO +80 °C
5-5	Storage Temperature Range	-30 TO +85 °C
5-6	Withstanding Voltage	DC 100 V
5-7	Temperature Coefficient Of Center Frequency (-20~+80°C)	±0.3% max
5-8	Insulation Impedance	100 MΩ min

P/N: WTL6R12062

Ceramic resonator ZTB



6. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

	Test Item	Condition of Test	Requirements
6-1	Lead Strength Lead Pulling Lead Bending	Applied to vertical weight 1Kg along with the direction of lead without any shock for 5-10sec. Filter lead shall be subjected to withstand against 90° bending its stem.This operation shall be done toward both direction.	No mechanical damage and the measured values shall meet Item 5.
6-2	Solderability	Dip the terminals of the filter no closer than 1.5mm into a soldering bath(230±5℃) for 5±1 sec . (refer to MIL-STD-202E-208C)	The solder shall be for coat at least 95% of the terminal surface
6-3	Vibration	Filter shall be measured after being applied vibration as below Vibration Freq: 10-55HZ Amplitude : 1.5 mm Directions : 3 axial directions Time : 1 hour/each direction	No visible damage and the measured value shall meet table 1
6-4	Random Drop	Filter shall be measured after 3 times) random dropping from the height of 76cm. concrete floor. (3次 76cm)	
6-5	Resistance to Soldering Heat (350 ±10℃)	Filter immersing the terminals up to 1.5 mm to filter's body in soldering bath for 3 sec., filter shall be measure after being placed in natural condition for 1 hour.	The measured value shall meet table 1.

P/N: WTL6R12062

Ceramic resonator ZTB



	Test Item	Condition of Test	Requirements
6-6	Humidity	After being placed in a chamber (Humic, :90-95% RH Temp.:40 \pm 2 $^{\circ}$ C) for 100 hours filter shall be measured after placed in natural condition for 1 hour	The measured value shall meet Table 1.
6-7	Life Test (High temperature)	After being placed in a chamber 85 \pm 2 $^{\circ}$ C for 100 hours ,filter shall be measured after being placed in natural condition for 1 hour.	
6-8	Life Test (Low temperature)	Placed in a chamber (Temp:-55 \pm 2 $^{\circ}$ C) for 100 hours,filter shall be measured placed in natural condition for 1 hour .	
6-9	Thermal Shock	After temperature cycling of -55 $^{\circ}$ C (30 minutes) to +85 $^{\circ}$ C (30 minutes) was performed 5 times with a transfer time15 min filter shall be measured after being placed in natural condition for 1 hour.	

P/N: WTL6R12062

Ceramic resonator ZTB



Table 1

Item	Limit Value
Center Frequency	+ 1.0 kHz max

Note: The limits in the above table are referenced to the initial measurements.

7. NOTICE

7.1 Ceramic filter should be stored in storeroom .And the surrounding atmosphere is acidness,alkali-free and no other harmful impurity.

7.2 The package for ceramic filter should be avoid the hit by rain and Snow,also the mechanical damage.

7.3 This specification limits the quality of the component as a single unit .Please make sure that the component is evaluated and confirmed the drawing When it is mounted to your product.