

# 3M™ Round Conductor Flat Cable

1.0 mm 28 AWG Stranded, PVC

3625 Series




Number of Conductors	3M Part Number	Dimension A	Dimension B
06	3625/06	6.00 ± 0.20 [ .236 ]	5.00 ± 0.18 [ .197 ]
08	3625/08	8.00 ± 0.20 [ .315 ]	7.00 ± 0.18 [ .276 ]
10	3625/10	10.00 ± 0.20 [ .394 ]	9.00 ± 0.18 [ .354 ]
12	3625/12	12.00 ± 0.20 [ .472 ]	11.00 ± 0.18 [ .433 ]
14	3625/14	14.00 ± 0.20 [ .551 ]	13.00 ± 0.18 [ .512 ]
16	3625/16	16.00 ± 0.22 [ .630 ]	15.00 ± 0.20 [ .591 ]
18	3625/18	18.00 ± 0.22 [ .709 ]	17.00 ± 0.20 [ .669 ]
20	3625/20	20.00 ± 0.22 [ .787 ]	19.00 ± 0.20 [ .748 ]
22	3625/22	22.00 ± 0.22 [ .866 ]	21.00 ± 0.20 [ .827 ]
24	3625/24	24.00 ± 0.22 [ .945 ]	23.00 ± 0.20 [ .906 ]
26	3625/26	26.00 ± 0.22 [ 1.024 ]	25.00 ± 0.20 [ .984 ]
28	3625/28	28.00 ± 0.22 [ 1.102 ]	27.00 ± 0.20 [ 1.063 ]
30	3625/30	30.00 ± 0.25 [ 1.181 ]	29.00 ± 0.23 [ 1.142 ]
32	3625/32	32.00 ± 0.25 [ 1.260 ]	31.00 ± 0.23 [ 1.220 ]
34	3625/34	34.00 ± 0.25 [ 1.339 ]	33.00 ± 0.23 [ 1.299 ]
36	3625/36	36.00 ± 0.25 [ 1.417 ]	35.00 ± 0.23 [ 1.378 ]
38	3625/38	38.00 ± 0.25 [ 1.496 ]	37.00 ± 0.23 [ 1.457 ]
40	3625/40	40.00 ± 0.25 [ 1.575 ]	39.00 ± 0.23 [ 1.535 ]
42	3625/42	42.00 ± 0.25 [ 1.654 ]	41.00 ± 0.23 [ 1.614 ]
44	3625/44	44.00 ± 0.25 [ 1.732 ]	43.00 ± 0.23 [ 1.693 ]
46	3625/46	46.00 ± 0.25 [ 1.811 ]	45.00 ± 0.23 [ 1.772 ]
48	3625/48	48.00 ± 0.25 [ 1.890 ]	47.00 ± 0.23 [ 1.850 ]
50	3625/50	50.00 ± 0.25 [ 1.969 ]	49.00 ± 0.23 [ 1.929 ]

mm  
[inch]


Tolerance Unless Noted			
	.0	.00	.000
Inch	±.3	±.13	

[ ] Dimensions for Reference Only

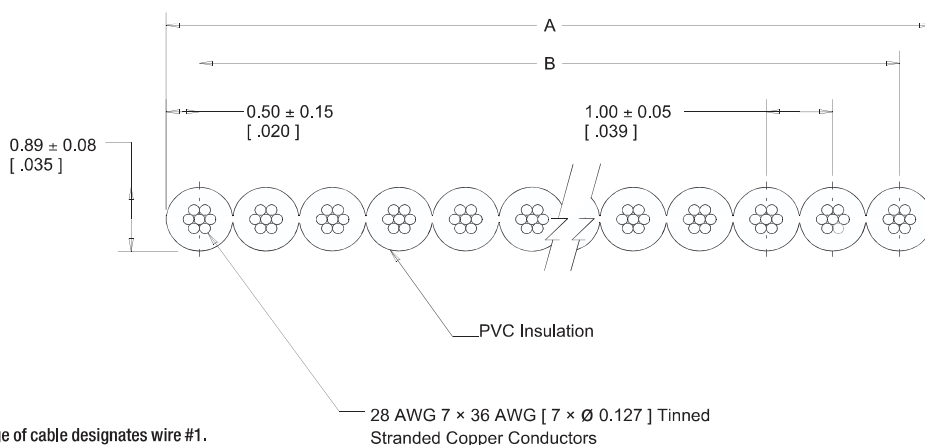

Note: Red marking on one edge of cable designates wire #1.

## Ordering Information

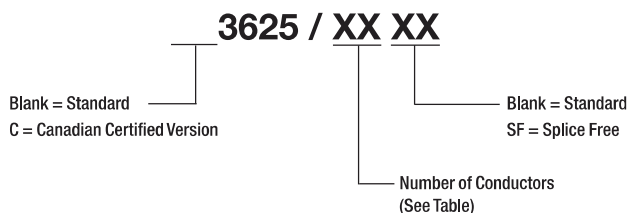

Note: Available in standard 30 m or 100 m rolls, please specify when ordering. Contact 3M for availability of additional conductor counts and/or custom roll lengths.

TS-0452-B  
Sheet 2 of 2