
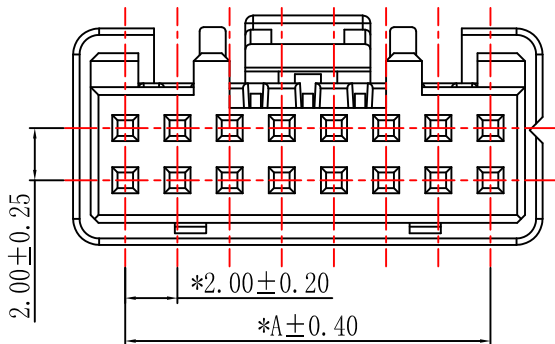
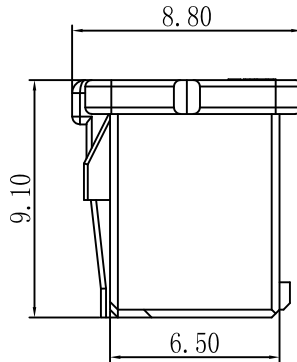
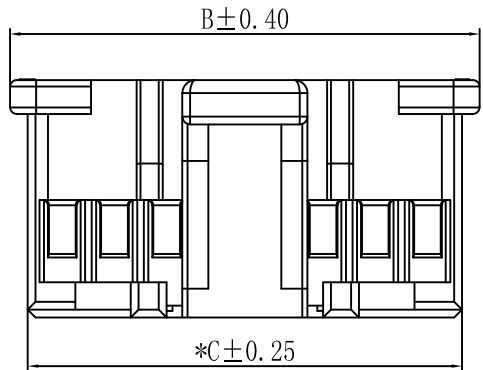
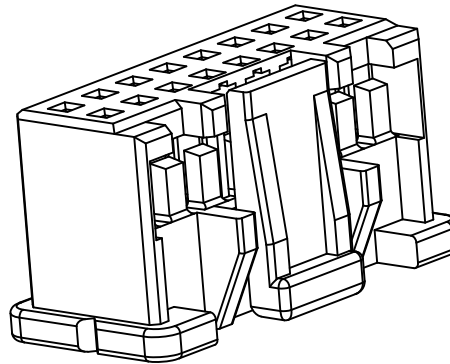


RoHS

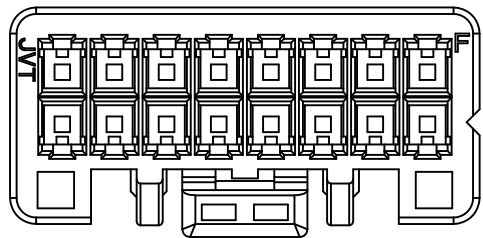

- SPECIFICATIONS :**
- Voltage Rating: 250V AC / DC
  - Current Rating: 3A AC / DC
  - Withstanding Voltage: 800V AC/minute
  - Temperature Range: -25°C~+85°C
  - Insulation Resistance: 1000MΩ Min.
  - Contact Resistance: 20mΩ Max.
  - \*Suitable JVT2060T series Terminal
  - JVT2060W series Wafer

**\*Material:**  
 Material: PA66 UL 94V-0  
 Color:natural color

**Packing specifications:**  
 2\*02~2\*05P 2,000 pcs/bag  
 2\*06~2\*10P 1,000 pcs/bag  
 2\*11~2\*20P 500 pcs/bag

\*is the key control size

JVT2060HNO-2\*XXL  
 Logo Series NO. Housing Lock Pin NO. PA66 UL94V-0

CKL	A	B	C	CKL	A	B	C
2*02	2.00	6.00	4.65	2*12	22.00	26.00	24.65
2*03	4.00	8.00	6.65	2*13	24.00	28.00	26.65
2*04	6.00	10.00	8.65	2*14	26.00	30.00	28.65
2*05	8.00	12.00	10.65	2*15	28.00	32.00	30.65
2*06	10.00	14.00	12.65	2*16	30.00	34.00	32.65
2*07	12.00	16.00	14.65	2*17	32.00	36.00	34.65
2*08	14.00	18.00	16.65	2*18	34.00	38.00	36.65
2*09	16.00	20.00	18.65	2*19	36.00	40.00	38.65
2*10	18.00	22.00	20.65	2*20	38.00	42.00	40.65
2*11	20.00	24.00	22.65				

			GENERAL TOLERANCE			Approved by			Check			Design			Standard			2.0mm HSG											
			0 ±0.35			LI			CLYDE			LU			P/N			JVT2060HNO-2*XXL											
			.0 ±0.30			Date			Date			Map title			031			Version											
Version			Content of change			Signature			Unit			mm			Scale			1:1			Date			20220115			A0		
A			B			C			D			E			F			G			H								

