


Customer ' s name 客户名称 :				
NO. 序号	Specified voltage and frequency 额定电压及频率	Specified capacity and capacity deviation 额定电容及电容偏差	Over all dimension 外形尺寸 (mm) (L×H×W) ±0.5	Remark 备注
1	450VAC 50/60Hz	0.5μF±10%	37×23×13	
2	450VAC 50/60Hz	1.2μF±10%	37×23×13	
3	450VAC 50/60Hz	1.5μF±10%	37×26×15	
4	450VAC 50/60Hz	2μF±10%	37×26×15	
5	450VAC 50/60Hz	2.5μF±10%	38×28×18	
6	450VAC 50/60Hz	2.75μF±10%	37×28×18	
Carry out standard 推行标准		GB 3667.1-2016/IEC60252-1: 2008		
Operating temp range 使用温度范围	-25~+70℃	Lifespan garden 寿命等级	C CLASS	
Withstanding standard 耐电压	Between terminals 端子相互间	2.0UN 2S无击穿及飞弧现象		
	Terminals to case 端子与外壳间 (金属外 壳)	-----		
Capacitance tolerance 电容偏差	±10%			
Loss angle tangent 损耗角正切	≤ 0.0020 (100 Hz)			
整 体	Shape 外形	See right picture 见右图		
	Condenser fuse 电容器芯子	Have self-healing 具有自愈性		

Customer recognizes  
客户承认:

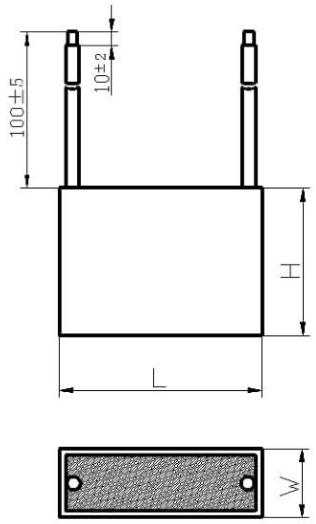

The technical drawing illustrates the physical dimensions of the capacitor. The side view shows a rectangular body with length L and height H. Two terminals extend from the top, with a total height of 100±5 mm and a diameter of 10±2 mm. The top view shows a rectangular body with length L and width W.

结 构	Case 外壳	Black of plastics outer shell 黑色塑料外壳	drafts system: 拟制: 林海燕	Name: : CBB61 metallized polypropylene film capacitor. 名称: CBB61 型金属化聚丙烯薄膜电容器
	Terminals 引出	2.2-2.4mm <sup>2</sup> black wire	Approval 核准: 徐银伍	Wenling jiyang capacitor co.,LTD 温岭市嘉洋电容器有限公司
	Filling 填充料	Black of Epoxy resin 黑色环氧树脂		