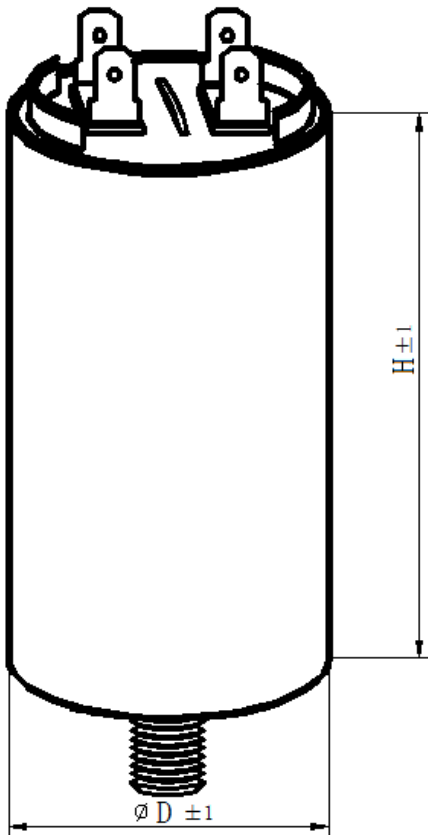


					Customer recognizes			
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension (mm) (φD×H) ±	Remark				
1	450VAC 50/60Hz	1μF±5%	φ30×57 M8					
Carry out standard		GB 3667.1-2016/IEC60252-1: 2013						
Operating temp range		-25~+70℃	Lifespan garden	C CLASS				
Withstanding standard		Between terminals	2.0U _N 2S no breakdown flashover					
		Terminals to case	-----					
Capacitance tolerance		±5%						
Loss angle tangent		≤ 0.0020 (100 Hz)						
	Shape	See right picture						
	Condenser fuse	Have self-healing						
	Case	White of plastics outer shell					Drafts system:	Name: : CBB60 metallized polypropylene film capacitor.
	Terminals	250# Terminal 2+2						
					Approval			