

**DMV-10W SERIES, 10WATT, 4:1 INPUT RANGE**
**FEATURES:**

- ✓ 1500Vdc isolation voltage
- ✓ Six-side shielded metal case with low ripple and noise
- ✓ High reliability, high efficiency
- ✓ Operating temperature range -40°C to +85°C
- ✓ 3 year warranty



Model	Input voltage (Vdc)	Output voltage (Vdc)	Output current (mA)	Efficiency Typ.
DMV10W-2411	24(9~36)	5	2000	80%
DMV10W-2412		9	1111	82%
DMV10W-2413		12	833	83%
DMV10W-2414		15	667	83%
DMV10W-2415		24	417	85%
DMV10W-2421		±5	1000	81%
DMV10W-2422		±9	555	82%
DMV10W-2423		±12	417	83%
DMV10W-2424		±15	333	84%
DMV10W-2425		±24	208	84%
DMV10W-4811	48(18~72)	5	2000	81%
DMV10W-4812		9	1111	82%
DMV10W-4813		12	833	83%
DMV10W-4814		15	667	83%
DMV10W-4815		24	417	84%
DMV10W-4821		±5	1000	81%
DMV10W-4822		±9	555	82%
DMV10W-4823		±12	417	83%
DMV10W-4824		±15	333	84%
DMV10W-4825		±24	208	84%

**Notes:**

1. Other input and output models may available on request;
2. Add suffix "C" for CTRL pin function.

**ELECTRICAL**

Output voltage accuracy	---	±2% max.
Line regulation	Nominal Load, full voltage	±0.5% max.
Load regulation	5% ~ 100% rated load	±1% max.
Switching frequency	Rated input voltage	300KHz typ.
Ripple and noise	20MHz BM, full load	100mVp-p max.



**DMV-10W SERIES, 10WATT, 4:1 INPUT RANGE**

**ELECTRICAL**

Isolation voltage (<1mA/min)	Input to output	1500Vdc
Isolation resistance	500Vdc	1000MΩ
Temperature coefficient	---	±0.03%/°C max.
Operating temperature range	---	-40°C to +85°C
Storage temperature range	---	-55°C to +125°C
Short circuit protection	---	Continuous auto-recovery
CTRL*	Turn on	Hang or connect high level(2.5-50Vdc)
	Turn off	Connect -Vin or low level(0-1.0Vdc)
	Shut off input current	10mA typ.
Relative humidity	---	5%-95% max.
MTBF	Bellcore TR-332, 25°C	1000KHrs
Weight	---	15g

**Notes: All the parameters are measured at 25°C ambient temperature, humidity < 75%, nominal input voltage, full load and after warm-up, unless otherwise specified.**

**MECHANICAL**

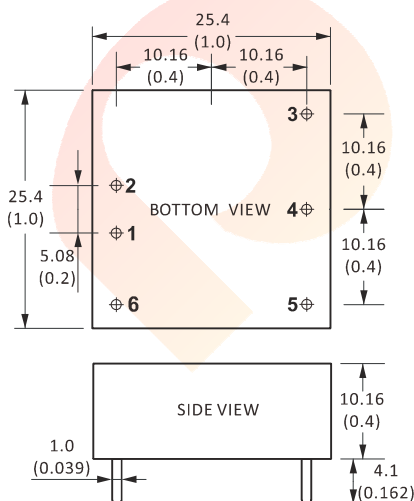

Unit: mm(inch)  
PCB vertical view  
Grid spacing: 2.54mm(0.1inch)

**CONNECTION**

PIN #	SINGLE	DUAL
1	GND	GND
2	+Vin	+Vin
3	+Vo	+Vo
4	No Pin	0V
5	0V	-Vo

**CONNECTION - "CTRL"**


1	GND	GND
2	+Vin	+Vin
3	+Vo	+Vo
4	No Pin	0V
5	0V	-Vo
6	CTRL	CTRL

Note:

\* Unit is mm(inch).

DMV-10W SERIES, 10WATT, 4:1 INPUT RANGE


ELECTRICAL CURVE

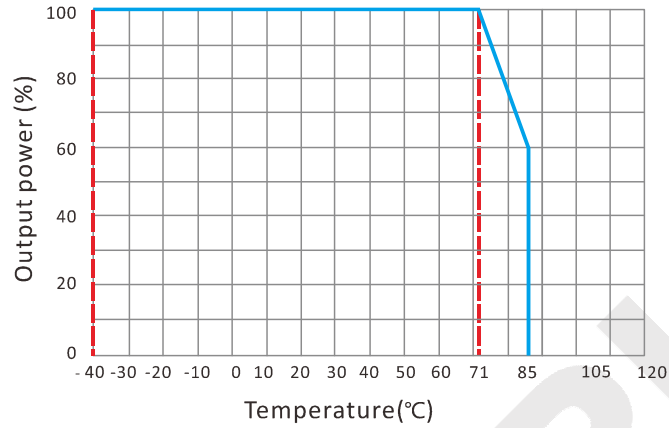

NOTES

RECOMMENDED TEST AND APPLICATION CIRCUIT

SINGLE OUTPUT

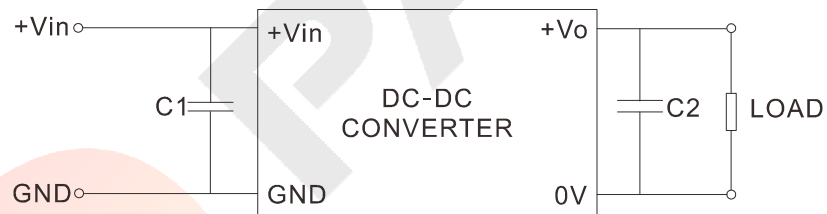

DUAL OUTPUT



**DMV-10W SERIES, 10WATT, 4:1 INPUT RANGE**
**NOTES**
**CAPACITOR SELECTION**

<b>INPUT VOLTAGE</b>	<b>C1</b>	<b>SINGLE OUTPUT</b>	<b>C2</b>	<b>DUAL OUTPUT</b>	<b>C2</b>
24VDC	47 $\mu$ F	5VDC	470 $\mu$ F	$\pm$ 5VDC	220 $\mu$ F
48VDC	10 $\mu$ F	9VDC	220 $\mu$ F	$\pm$ 9VDC	100 $\mu$ F
--	--	12VDC	100 $\mu$ F	$\pm$ 12VDC	47 $\mu$ F
--	--	15VDC	100 $\mu$ F	$\pm$ 15VDC	47 $\mu$ F
--	--	24VDC	47 $\mu$ F	$\pm$ 24VDC	22 $\mu$ F