

Connecting plugs

Connecting plug KS4-1...


Insulated, Ø 4 mm, made of brass. Equipped with spring-loaded MULTILAM to ensure vibration-proof contacts – ideal use is in the automotive field for test drives and servic-

ing. Ø 4 mm rigid socket in insulator accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve.

KS4-11L/1A/N




KS4-11L/1A/A

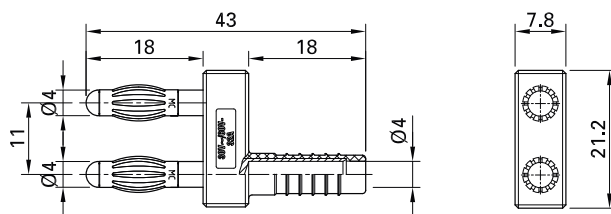

KS4-14LA/N



KS4-14LA/A

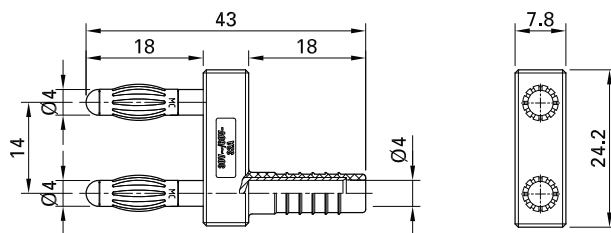

| Order No. | Type | Rated voltage/current | Plug spacing | | Standard colors |
|------------|--------------|--------------------------------|--------------|----|-----------------|
| 64.9302-21 | KS4-11L/1A/N | 30 VAC / 32 A 60 VDC / 32 A | 11 mm | Ni | 21 |
| 64.9301-21 | KS4-11L/1A/A | 30 VAC / 32 A 60 VDC / 32 A | 11 mm | Au | 21 |
| 20.1010-21 | KS4-14LA/N | 30 VAC / 32 A 60 VDC / 32 A | 14 mm | Ni | 21 |
| 20.1020-21 | KS4-14LA/A | 30 VAC / 32 A 60 VDC / 32 A | 14 mm | Au | 21 |

