

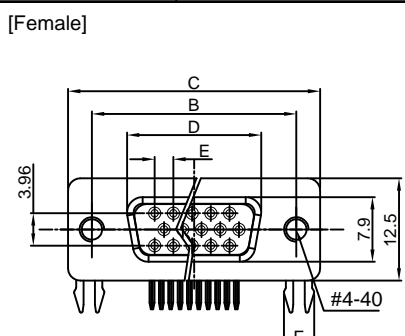


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.




Dimension



Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.84	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41

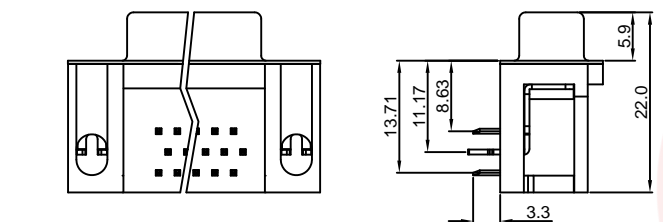


With screw type

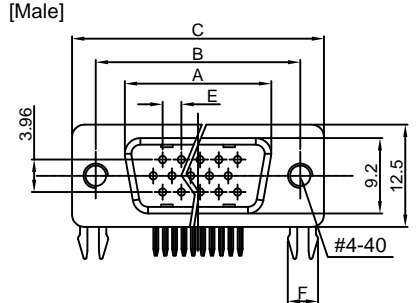

With rivet type

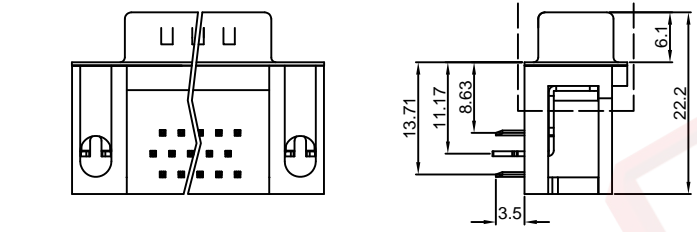

With screw and rivet type



Recommend PCB layout  
(Tolerance:±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1038-XXXXXXX-XXX-D		

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/27/05'		LJC 09/27/05'
D	DRAWING UPDATE	JLZ 10/07/20'		

NOTES:

- Electrical characteristics:
  - Contact resistance: 20mΩ Max. Initial.
  - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
  - Insulation resistance: 1000MΩ Min.
- Environment characteristics:
  - Temperature range: -40°C~+105°C.
- Materials:
  - Insulator:PBT+Glass fiber
  - Shell:Steel
  - Contact:Copper alloy
- Product number code:  
 DS1038 - X X X X X X X X-XXX
  - Screw materials  
F: Steel C: Copper alloy
  - Board lock materials  
F: Steel C: Copper alloy
  - Insulator materials  
0: PBT UL94 V-0  
Screw DIM. E  
4: 4.80mm 5: 5.80mm
  - Board lock DIM. F  
7: 3.70mm
  - Screw type  
A: With screw type B: With rivet type  
C: Rivet type with fixed screws  
D: Rivet type with screws in bulk package
  - Contact plating  
Si: Selective gold flash  
8: Full gold flash
  - Shell plating  
N: Nickel
  - Color of housing  
B: Black U: Blue C: Blue(PC99)
  - Connector type  
M: Male F: Female
  - No. of contact  
15,26,44,62



(Series Image-Reference Only)

PROJECTION		TITLE
UNITS	mm	H.D-SUB R/A Type
SHEET SIZE	A4	SERIES DS1038 SERIES

**晨翔电子有限公司**  
CONNPLY CONNPLY ELECTRONIC CO. LTD