

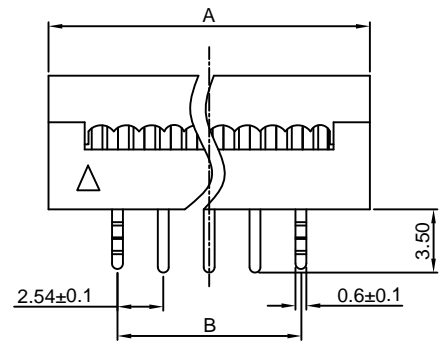
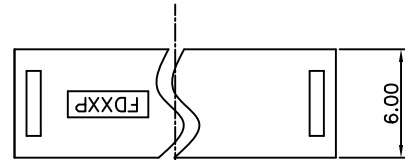


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document without the prior written consent of CONNELY may result in legal action. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

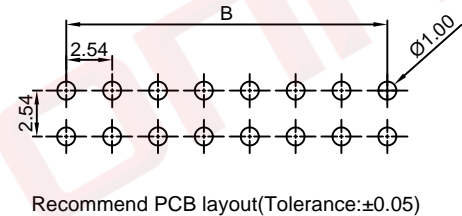

Position	Dim. A	Tol.	Dim. B	Tol.
06	12.92	±0.30	5.08	±0.25
08	15.46		7.62	
10	18.00		10.16	
12	20.54		12.70	
14	23.08		15.24	
16	25.62		17.78	
20	30.70	±0.35	22.86	±0.35
26	38.32		30.48	
30	43.40		35.56	
34	48.48		40.64	
40	56.10		48.26	
50	68.80		60.96	
60	81.50		73.66	
64	86.58		78.74	

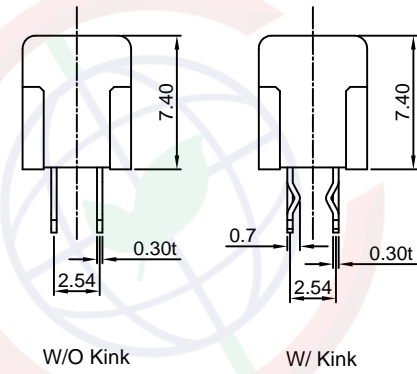


(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/21/05'		LJC 09/21/05'
C	ADD CONTACTS TYPE	JLZ 09/25/14'		LJC 09/25/14'
E	DRAWING UPDATE	JLZ 10/26/17'	HZW 10/26/17'	LJC 10/26/17'
F	DRAWING UPDATE	JLZ 08/28/18'		

NOTES:

- Materials
 - 1.1 Insulator: Thermoplastic(UL 94V-0).
 - 1.2 Contact: Copper alloy.
- Specification
 - 2.1 Temperature: -40°C~+105°C.
 - 2.2 Contact resistance: 20mΩ max.
 - 2.3 Insulation resistance: 1000MΩ min.
 - 2.4 Dielectric withstanding voltage: AC 500V per minute.
- Product number code:

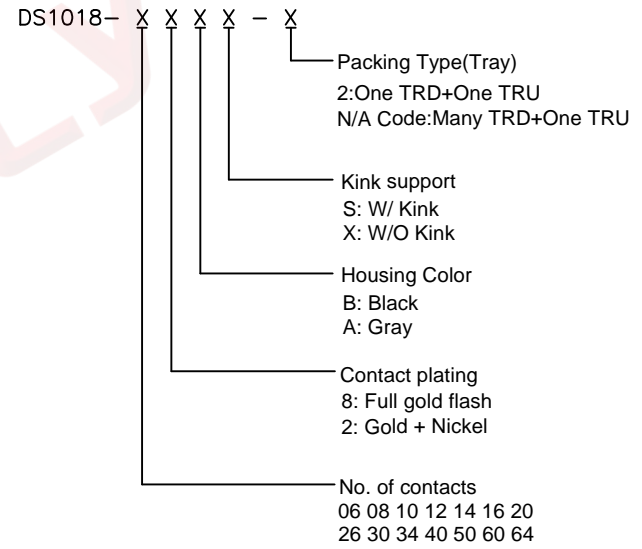

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	DIP PLUG CONNECTOR PITCH 2.54mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1018 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1018-XXXX-F					