


AMASS

(Item No): MT30-M

(Drawing)

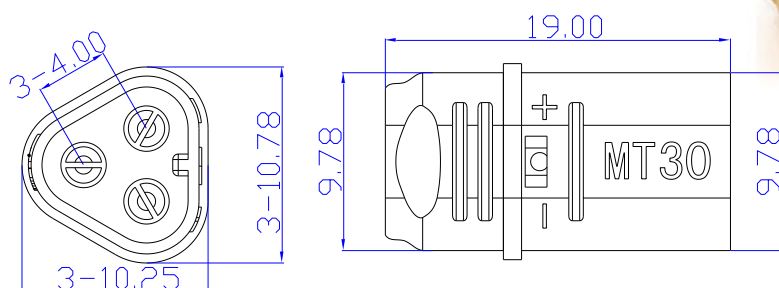

■ (Material & Parameter)

Item No.	MR30-M	CR	1.00mΩ
COLOR	2 3		DC 500V
Metal Material	Brass Gold Plated	RC	15A
Plastic Material	PA	MC	30A
FR LEVEL	UL94 V0	USE TIMES	1000 TIMES
Recommend USE	MOTOR	Cable SPEC.	16AWG
CERTIFICATION	CE/UL	TEMPERATURE	-20°C to 120°C

★ (Data sheet will change according with the test background)