
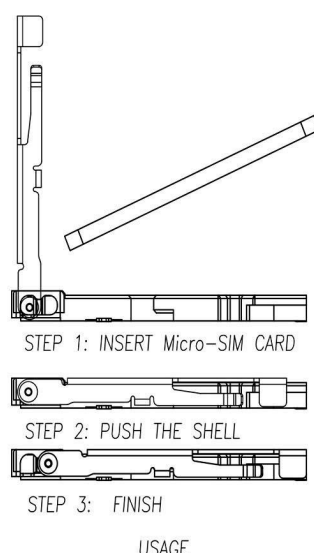


- NOTES:
- Material:  
Housing:LCP,UL94v-0; Black  
Contact:Phosphor Bronze, C5210H ,T=0.15;  
Shell:stainless steel. T=0.2
  - Finish:  
Contact:gold flashed allover and nickel under-plated allover.
  - Electrical specifications:  
Contact resistance:30m Ohm MAX.  
Voltage rating(SELV):30Vdc MAX.  
Current rating:1A  
Dielectric strength:500Vrms min.1 MIN.  
Insulation resistance:500M Ohm MIN.
  - Climatic characteristics:  
Operation temperature:-40°C to +85°C
  - Mechanical specifications:  
Contact force nominal:20-50cn  
Mechanical lifetime:3,000 mating cycles MIN.  
6.IR reflow:245±5°C,10sec. MAX.

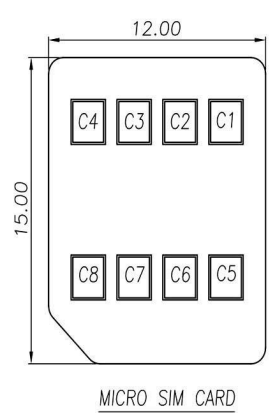

PIN ASSIGNMENT AS BELOW TABLE:

| PIN NO. | NAME     | PIN NO. | NAME     |
|---------|----------|---------|----------|
| C1      | VCC      | C5      | GND      |
| C2      | RST      | C6      | VPP      |
| C3      | CLK      | C7      | I/O      |
| C4      | RESERVED | C8      | RESERVED |

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准 Betty  
DWG. 製圖 Helen  
DATE 制表日 2024/5/30

SCALE 比例 参考  
UNIT 單位 MM  
PAGE 張數 1 OF 1

PART NAME 品名  
MICRO SIM CARD CONNECTOR HINGED TYPE  
6PIN SMT TYPE H=1.8mm SELECTIVE GOLD  
PLATING BLACK COLOR REEL PACKING ROHS

PART NO. C0636-06DASBR1R  
料號