


NOTES1:
 UL Standard
 1.Rated Voltage/Current : 300V / 60A
 2.Torque Value : M4 , 10.53Lb.in
 3.Wire Range : 20~6AWG

IEC Standard
 1.Rated Voltage/Current : 1000V / 65A
 2.Torque Value : M4 , 1.2N.m
 3.Wire Range : 2.5~16.0mm²

NOTES2:
 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 10.16mm, Poles : N=01~XXP
 3.Stripping length : 10~11mm
 4.Withstanding Voltage : AC3500V/1Min.
 5.Operating temperature : -40°C~+105°C
 6.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
TO	Over TO	TO	Over TO	TO	Over TO		
6	10	30	60	100	150	0.1/10	
6	24	30	60	100	150	<	
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30						±2°	

7.RoHS Compliance

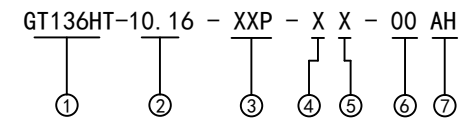

- ① Series No.
- ② Pitch
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request : 00--Standard
- ⑦ AH--Standard(PA66)

DETACHED LISTS	PART NO.: WX / 11/08/18'		Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					
	APPD: /						NAME: GT136HT-10.16-XXP-XX-00AH	
	CHKD: /		DRFT: /		TITLE: CUSTOMER DRAWING		REV	D0
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET	1/1		
 DO NOT SCALE DRAWING			SCALE	1:1				