


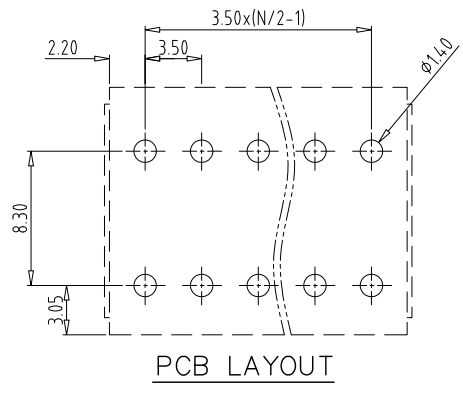
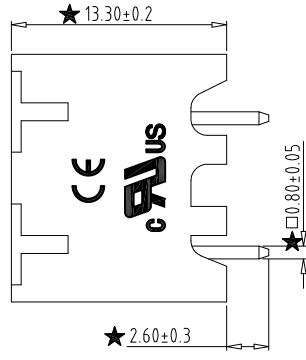


REV	CONTENT	CHK	DATE
V0.0	CONTENT	DLL	20.06.30

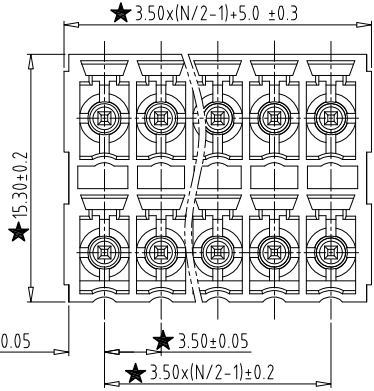

NOTES1:
 UL Standard
 1. Rated voltage/current : 300V/8A
 2. Withstanding voltage : AC1600V/1Min
 IEC Standard
 1. Rate impulse voltage(KV) : 2.5KV
 2. Rate voltage(V) : 250V
 3. Rate current(A) : 8A

NOTES2:
 1. Pitch : 3.5mm
 2. Poles : N=04~48P
 3. Operating temperature : -40℃~+130℃
 4. RoHS Compliance
 5. ★ "Point refers to the quality control point."

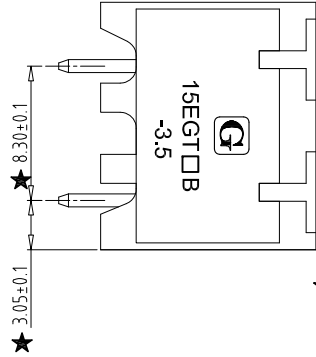

15EGTVHB - 3.5 - XXP - X X - 00

Customer Request:
 00-Standard
 Color: 1 Grey
 2 Blue
 3 Black
 4 Green
 5 Orange
 6 Red
 7 Transparent
 8 Yellow
 9 White

Single Pitch
 Double Pitch

Poles
 02 02Contacts
 03 03Contacts
 ...
 20 20Contacts

Pitch
 Series No

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	0	over 10	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		

1	Housing	XXXXXX	1	PA66	UL94V-0
1	Pin	XXXXXX	2P	Brass	Tin Plated
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DLL	DATE	20.06.30	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE			SCALE	1:1
APP.	DATE				
NAME				15EGTVHB-3.5-XXP-XX-00	
DWGNO.				XXXX	

Golten 宁波冠泰电子有限公司
 NINGBO GOLTEN ELECTRONICS CO., LTD.