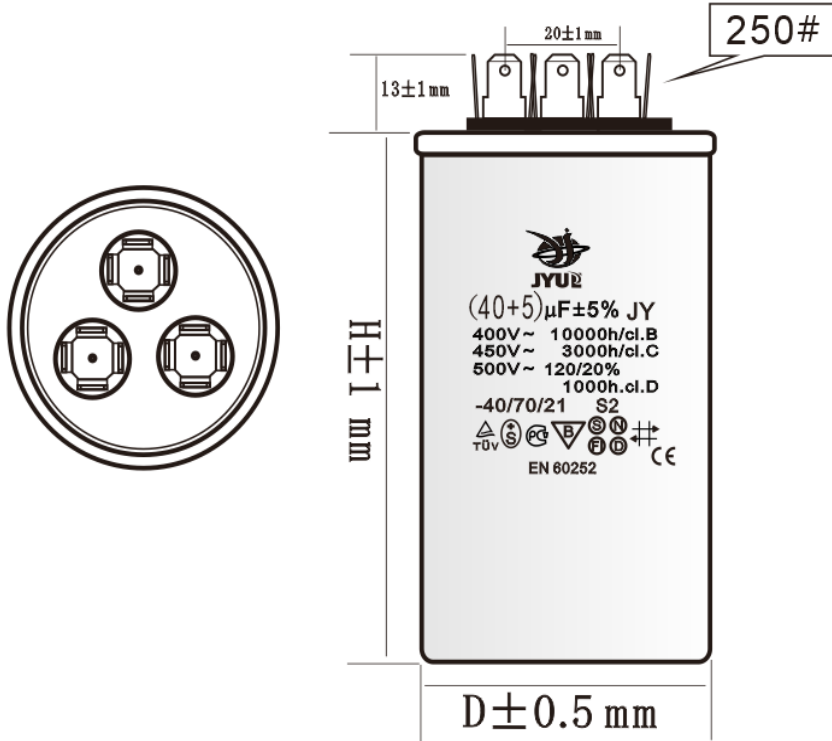


Customer ' s name					Customer recognizes:		
NO.	Specified voltage and frequency	Specified capacity and capacity deviation	Over all dimension	Remark			
1	450VAC 50/60Hz	20+5 μ F \pm 5%	50 \times 85	A1			
2	450VAC 50/60Hz	25+5 μ F \pm 5%	50 \times 85				
3	450VAC 50/60Hz	30+5 μ F \pm 5%	50 \times 85				
4	450VAC 50/60Hz	35+5 μ F \pm 5%	50 \times 85				
5	450VAC 50/60Hz	40+5 μ F \pm 5%	50 \times 90				
Carry out standard		GB/T3667.1-2016/IEC60252-1: 2013					
Operating temp range		(-40~+70 $^{\circ}$ C)	Lifespan garden	C CLASS			
Withstanding standard		Between terminals	2.0Un				
		Terminals to case	2.5KVC/2S				
		safety class	S2				
Capacitance tolerance		\pm 5%					
Loss angle tangent		\leq 0.0050 (1000 HZ)					
	Shape	See right picture					
	Condenser fuse	Have self-healing					
	Case	ALUMINIUM CASE					
	Terminals	4+4+4 PINS					
	Filling	Special wax					
					Drafts system:	Name: CBB65 metallized polypropylene film capacitor.	
					Approval	Wenling jiyang capacitor co.,LTD	