


NIMH RECHARGEABLE CYLINDRICAL BATTERY


SPECIFICATIONS

Model	:	MH650AAA8HL
Description	:	NiMH rechargeable battery, 'AAA' size, flat cap
Nominal Capacity	:	650 mAh at 130mA rate discharge (3 cycles allowed)
Nominal Voltage	:	9.6 Volt (After charge)
Cut-Off Voltage	:	8.0 Volt
End of Charge Voltage	:	≤ 12.8 Volt
End of Discharge Voltage	:	≥ 7.2 Volt
Weight	:	96 gram
Life Duration	:	≥ 500 cycles (Comply to IEC 61951-2 2nd Ed. 2003-04)
Charge	:	Trickle - 19.5-32.5 mA Standard - 65 mA x 14 hours Quick - 325 mA x 2.5 hours (with cut-off control)
Recharge	:	Every 3-6 months recommended
Temperature Environment	:	Standard charge - 0 degC to 45 degC Quick charge - 10 degC to 40 degC Discharge - -20 degC to 60 degC Storage - -20 degC to 40 degC
Trickle Charge	:	19.5mA for 28 days, no leakage, no explosion
Charge Retention	:	$>60\%$ for 28 days storage after standard charge
Leakage	:	No leakage, No explosion under standard operating condition
Vibration	:	Battery remain normal after vibration at Amp: 4mm; Freq.: 1000/min for 60 min.
Shock	:	Battery remain normal after dropping from 450mm to an Oak board for 3 times



Typical Standard Charge Characteristics (Cylindrical Cell)

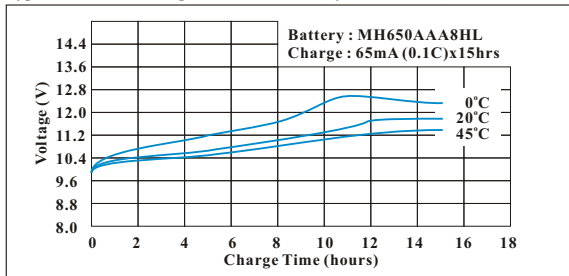


Typical Quick Charge Characteristics (Cylindrical Cell)

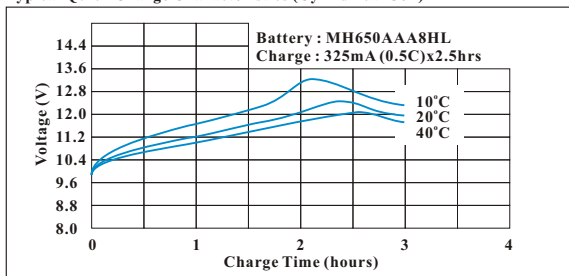

Typical Discharge Characteristics (Cylindrical Cell)

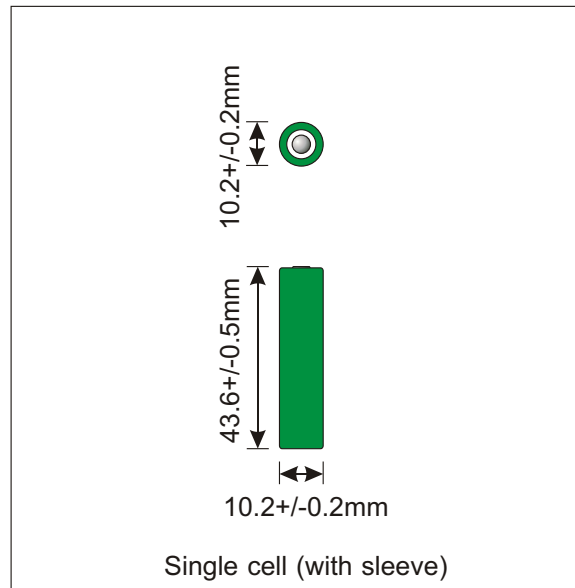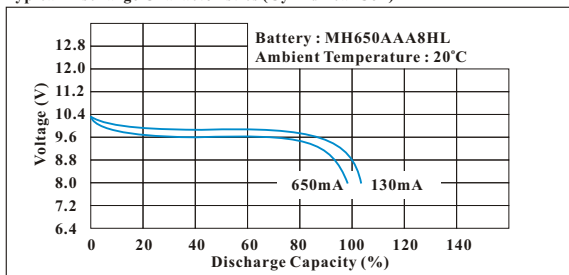

Typical Storage Characteristics (Cylindrical Cell)

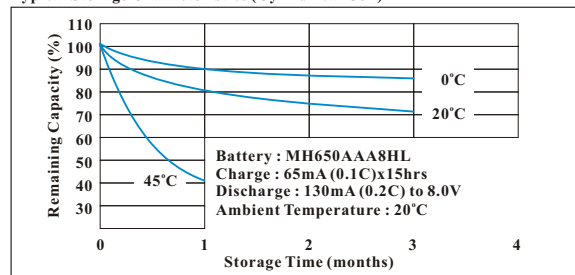

Information is for references only.


Model : MH650AAA8HL
Version : 2.40

WELL LINK
INDUSTRIAL LIMITED

KBG03/8H

NIMH RECHARGEABLE CYLINDRICAL BATTERY

DRAWING

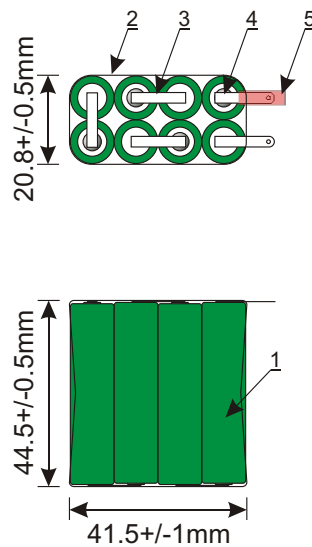

5	Shrink Tube	1
4	Soldering Tags (0.13mm)	2
3	Connecting Tags (0.13mm)	7
2	Green PVC Sleeve	1
1	NiMH AAA 650mAh Battery	8
Item	Details	Qty

Information is for references only.

Model : MH650AAA8HL
Version : 2.40

WELL LINK
INDUSTRIAL LIMITED

KBG03/8H