


# NIMH RECHARGEABLE PRISMATIC BATTERY



## SPECIFICATIONS

Model	:	MH750PF6
Description	:	NiMH prismatic rechargeable battery, size 'F6', flat cap
Nominal Capacity	:	750mAh (Min. 700) at 150mA rate discharge (3 cycles allowed)
Nominal Voltage	:	1.2 Volt (After charge)
Cut-Off Voltage	:	1.0 Volt
End of Charge Voltage	:	<= 1.6 Volt
Approx. Weight	:	18 gram
Life Duration	:	>= 500 cycles (Comply to IEC 61951-2 Ed. 4.0:2017)
Charge	:	Trickle - 22.5-37.5 mA Recommended/Standard - 75 mA x 14-16 hours Quick - 375 mA x 2.5 hours (with cut-off control)
Recharge	:	Every 3-6 months recommended
Temperature Environment	:	Standard charge - 0 degC to 45 degC Quick charge - 10 degC to 40 degC Discharge - -20 degC to 60 degC Storage - -20 degC to 40 degC
Trickle Charge	:	22.5mA for 28 days, no leakage, no explosion
Charge Retention	:	>60% for 28 days storage after standard charge
Leakage	:	No leakage, No explosion under standard operating condition
Vibration Test (for cell)	:	Battery remain normal after vibration at Amp: 4mm; Freq.: 1000/min for 60 min.
Shock Test (for cell)	:	Battery remain normal after dropping from 450mm to an Oak board for 3 times


Typical Standard Charge Characteristics (Prismatic Cell)

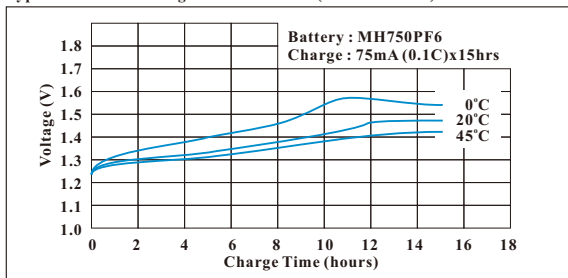


Typical Quick Charge Characteristics (Cylindrical Cell)

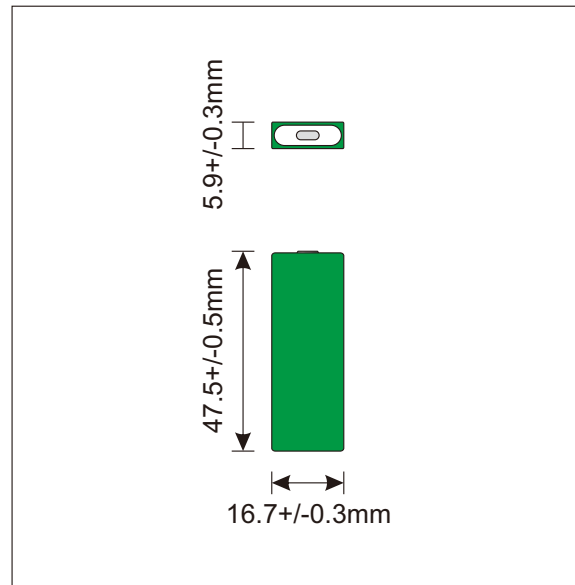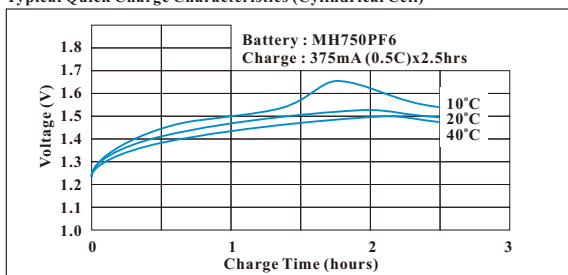

Typical Discharge Characteristics (Prismatic Cell)

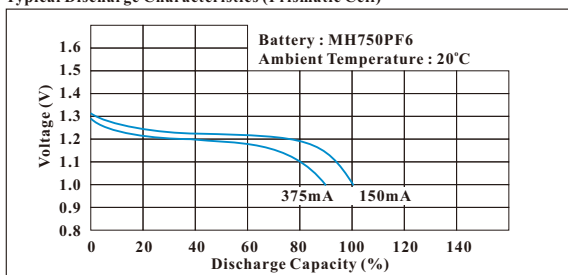

Typical Charge Retention Characteristics (Cylindrical Cell)

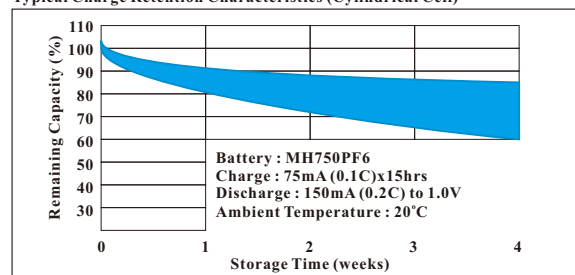

Information is for references only. Performance varies with time, usage and storage condition. 1 year limited guarantee against manufacturing defects. Other problem caused by misuse, mishandling of cell, or malfunction of equipment, is not under the warranty.

Model : MH750PF6  
Version : 2.61

**WELL LINK**  
INDUSTRIAL LIMITED

**PBC01**