





Holder / No. 646

PC Mount, for 5x20mm Fuses, lead free

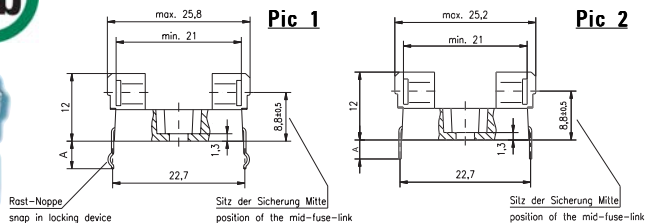

Specifications

Mounting

Solder pins 0.5mm x 1.2mm
 Ø 3mm screw hole may be used optionally

Materials

Holder: Black Thermoplastic, UL94 V-0
 Polyamide PA 6.6
 Metal Parts: Copper alloy, solderable, tinned

Electrical Data (23°C)

Rated Voltage: 250V
 Max. current/power: 6.3A/2.5W
 5A/1W (with No. 648)
 6.3A/1.6W (with No. 640)

Minimum Cross Section

Conducting path - 0.2mm²

Unit Weight

1.6g

Packaging

Bulk (1000 pcs.)

Type	Pic	Meas. "A"	for PCB-Thickness
100	1	5mm	3mm
122	1	3.2mm	1.5mm
123	2	3.3mm	1.5mm