


# GP Batteries

**Data Sheet**

**Model No.: GP303**

Description	: Silver Oxide Low Drain Button Cell
Nominal Voltage	: 1.55Volts
Nominal Dimensions	: Ø11.60mm×5.40mm
Application	: Watch(with alarm and lamp), . calculator, electronic toys, etc.
Average Weight	: 2.5g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ± 2 °C 45-75 %RH.
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 200Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service Life	: 1650hrs (at 15kΩ load) (to 1.2V at 20 ± 2 °C) 230days(at 50 kΩ load)
Average Service Capacity	: 165mAh(at 10kΩ load) (to 1.2V at 20 ± 2 °C)


**Typical Discharge characteristics at 20 ± 2 °C**

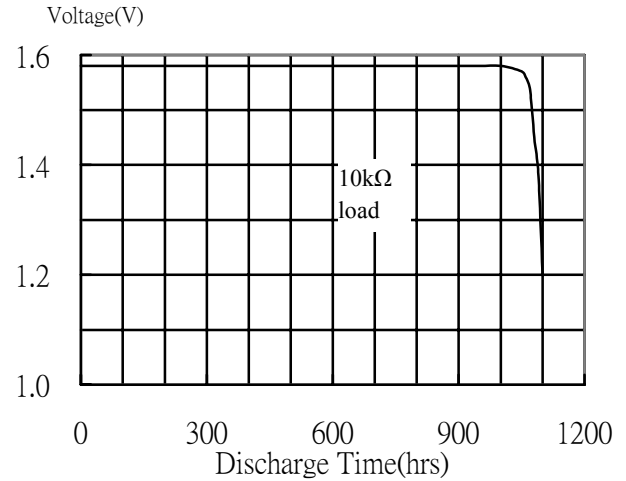

**Cross References:**

IEC JIS Eveready Panasonic Sony Duracell Varta

SR44 SR44 303 SP303 SR44W D303 V303

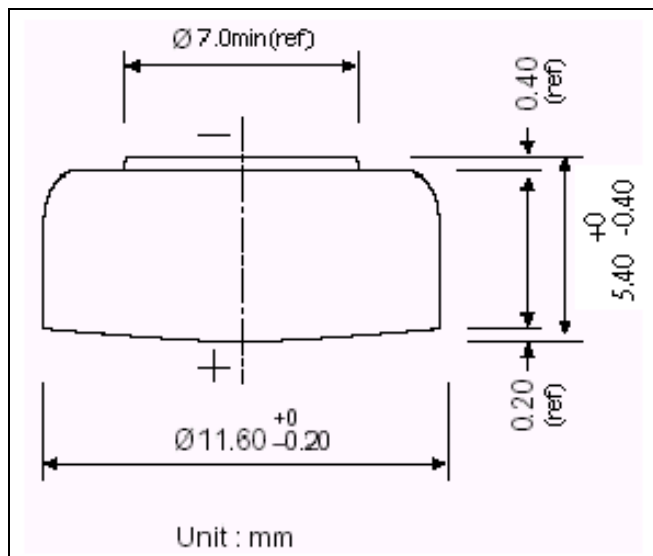

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

