


# Specification Sheet

Max Interrupt Voltage: 130 Vac  
 Max Operating Voltage: 60 Vdc  
 Maximum Interrupt Current: 10 A

Insulating Material:  
 meets UL94 V-0 Requirements

Lead-free, RoHS compliant

Lead Material:  
 Tin plated copper, 0.8 Dia.

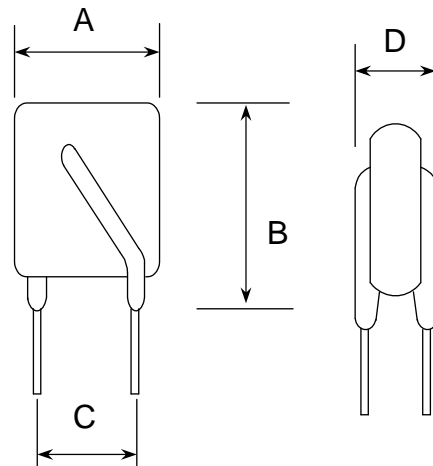

F1

TABLE I. DIMENSIONS:

	A	B	C	D	LEAD
	MAX	MAX	TYP	MAX	TYP
mm	18.0	25.0	10.2±0.5	3.8	F1

TABLE II. PERFORMANCE RATINGS:

Model	$V_{max}$ (Vac)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	Maximum Time To Trip		Resistance	
					Current	Time	Ri min	Ri max
					(A)	(Sec)	(Ω)	(Ω)
BpA01.85-130	130	10	1.85	3.70	5.55	25.0	0.12	0.25