


Unit: mm

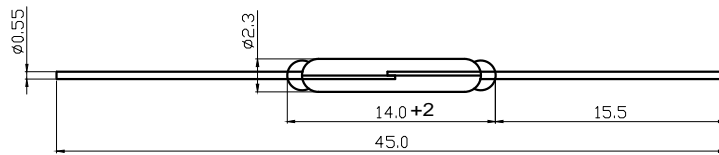

20	Contact style	A		
19	Max Power	10W		
18	Max Switch Voltage	100VDC		
17	Resistance to high pressure	220VDC		
16	Max Switch Current	0.5A		
15	Max Load Current	1.0A		
14	Max Contact Resistance	100Mohm		
13	Min insulation resistance	10^{10} ohm		
12	Action Time	0.4ms		
11	Bounce time	0.4ms		
10	Release time	0.1ms		
Title	Reed switches	9	Response frequency	4000Hz
Part No.	BL-14013-14	8	Max working frequency	500Hz
Drawing No.		7	Sensitive value	10-15AT 15-25AT 25-45AT
Unit	MM	6	Minimum reset min value	4FT
Scale	4:1	5	Max contact capacitance	0.7PF
Drawing	Zhang Wenhao	4	Electrical life	10^8 (5VDC, 10mA)
Check		3	Load	10^5 (24VDC, 400mA)
Approval		2	Test coil number	5000
BAILING ELECTRONICS CO., LTD. www.Beelee-switch.com TEL:86-0769-22176561 FAX:86-0769-22778617		1	Test coil resistance	870ohm
Characteristics				