


<p>DIMENSION(UNIT:mm)</p> 			A	33.5 ± 1.0	m/m
			B	12.0 ± 0.4	m/m
			C	6.5 ± 0.5	m/m
			D	29.0 ± 1.0	m/m
			E	1.7 ± 0.4	m/m
ELECTRICAL REQUIREMENTS					
MIN 25 OHM	TEST FREQ	25 MHz			
MIN 90 OHM	TEST FREQ	100 MHz			
MATERIAL (ui)	1000 ± 25%				
WIRE	$\phi 0.6 \times 120$ mm				
WINDING	1 Ts				

IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C	D	E	
SPEC	MIN 25 OHM	MIN 90 OHM		33.5 ± 1.0	12.0 ± 0.4	6.5 ± 0.5	29.0 ± 1.0	1.7 ± 0.4	
1	43.4	125.2		33.85	12.07	6.65	29.32	1.77	
2	42.1	126.1		33.75	12.15	6.75	29.48	1.71	
3	41.9	124.8		33.77	12.03	6.69	29.20	1.68	
4	42.7	127.8		33.83	12.13	6.71	29.55	1.69	
5	42.2	125.3		33.82	12.12	6.81	29.36	1.75	
6	43.4	125.2		33.85	12.07	6.65	29.32	1.77	
7	42.1	126.1		33.75	12.15	6.75	29.48	1.71	
8	41.9	124.8		33.77	12.03	6.69	29.20	1.68	
9	42.7	127.8		33.83	12.13	6.71	29.55	1.69	
10	42.2	125.3		33.82	12.12	6.81	29.36	1.75	
X	42.5	125.8		33.80	12.10	6.72	29.38	1.72	
R	1.5	3.0		0.10	0.12	0.16	0.35	0.09	

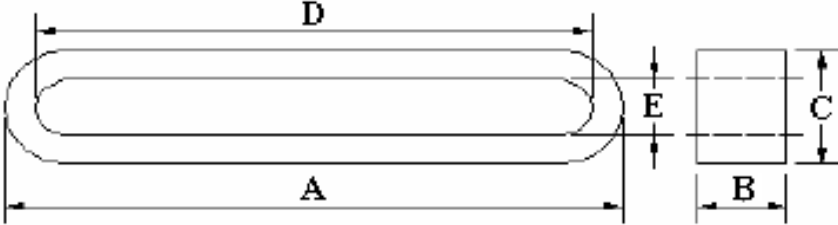