


DIMENSION(UNIT:mm)  			A	16.0 ± 0.4	m/m
			B	16.0 ± 0.4	m/m
			C	8.0 ± 0.3	m/m
ELECTRICAL REQUIREMENTS			SCHEMATIC		
MIN	50 OHM	TEST FREQ	25	MHz	
MIN	125 OHM	TEST FREQ	100	MHz	
MATERIAL (ui)	800 ± 25%				
WIRE	2UEW φ 0.6 × 120mm				
WINDING	1 Ts				

IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz			A	B	C		
SPEC	MIN 50 OHM	MIN 125 OHM			16.0 ± 0.4	16.0 ± 0.4	8.0 ± 0.3		
1	65.2	152.9			16.01	15.98	8.03		
2	68.7	156.9			15.98	16.00	7.96		
3	67.3	158.5			16.16	15.78	8.00		
4	66.8	153.7			16.11	16.17	8.16		
5	66.0	148.8			16.07	16.35	8.10		
6	65.2	152.9			16.01	15.98	8.03		
7	68.7	156.9			15.98	16.00	7.96		
8	67.3	158.5			16.16	15.78	8.00		
9	66.8	153.7			16.11	16.17	8.16		
10	66.0	148.8			16.07	16.35	8.10		
$\bar{X}$	66.8	154.2			16.07	16.06	8.05		
R	3.6	9.7			0.18	0.57	0.20		

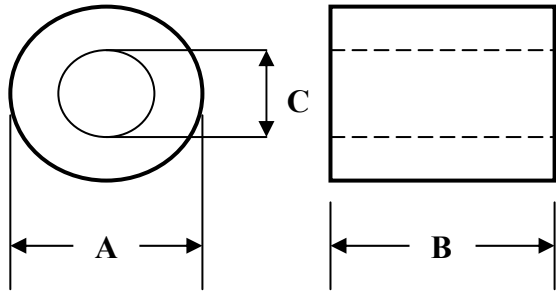