
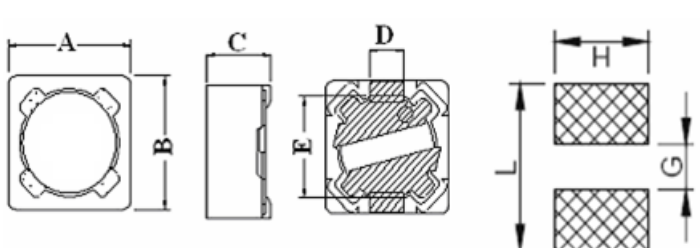


D SP073/0022.0/1.5A

DIMENSION(UNIT: mm) 		A 7.3 ± 0.3 m/m B 7.3 ± 0.3 m/m C 3.4 (MAX) m/m D 2.0 (REF) m/m E 5.0 (REF) m/m G 4.8 (REF) m/m H 2.2 (REF) m/m L 7.8 (REF) m/m
ELECTRICAL REQUIREMENTS		SCHEMATIC 
L (uH)	22 ± 20%	
RDC (Ω)	0.19 (MAX)	
IDC (A)	1.5 (MAX)	
TEST CONDITION	1KHZ / 1V	
MATERIAL LIST		
	MATERIAL	
WIRE TYPE	2UEW φ 0.23m/m	
WINDING	21.5 TS (REF)	

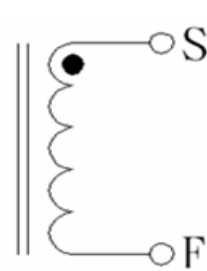

MICROS

D SP073/0022.0/1.5A

TEST CONDITION: 1KHZ / 1V				DIMENSION (UNIT : mm)			
ITEM	L (μ H)	RDC (Ω)	IDC (A)	A	B	C	
SPEC	22 $\pm 20\%$	0.19 (MAX)	1.5 (MAX)	7.3 ± 0.3	7.3 ± 0.3	3.4 (MAX)	
1	21.0	0.12	OK	7.38	7.32	3.20	
2	22.4	0.12	OK	7.28	7.34	3.20	
3	22.1	0.12	OK	7.40	7.32	3.22	
4	22.7	0.12	OK	7.40	7.30	3.22	
5	22.6	0.12	OK	7.32	7.30	3.23	
6	21.3	0.11	OK	7.34	7.36	3.23	
7	21.6	0.12	OK	7.36	7.30	3.20	
8	22.8	0.11	OK	7.33	7.30	3.22	
9	21.9	0.11	OK	7.36	7.40	3.20	
10	21.8	0.11	OK	7.28	7.42	3.21	
\bar{X}	22.0	0.12		7.35	7.34	3.21	
R	1.8	0.01		0.12	0.12	0.03	

D SP073/0022.0/1.5A

