


■ **Features**

- High-power LED
- Long lifetime operation
- Based on ceramic substrate to achieve long operating life
- Typical luminous flux performance 420lm@600mA
- Possible to attach to heat sink directly without using print circuit board.

■ **Applications**

- Indoor & outdoor lighting
- Stage lighting
- Reading lamps
- Display cases, furniture illumination, marker
- Architectural illumination
- Spotlights

■ **Outline Dimension**

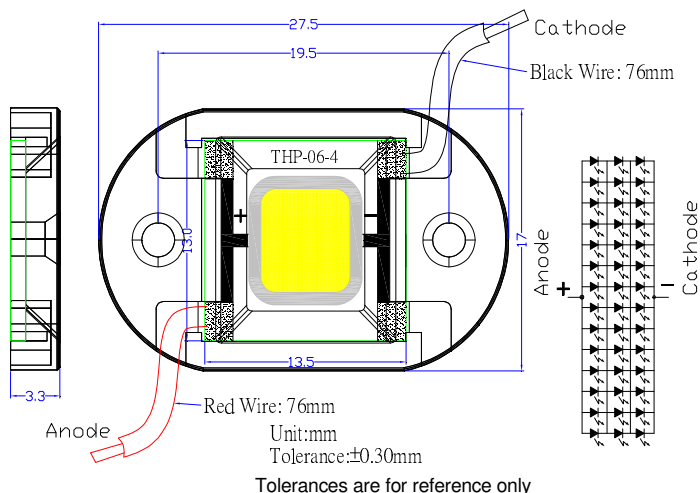

■ **Absolute Maximum Rating**


(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current *1	I _F	700	mA
Pulse Forward Current*2	I _{FP}	1400	mA
Reverse Voltage	V _R	15	V
Power Dissipation*1	P _D	6,840	mW
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-40~ +100	°C
Lead Soldering Temperature	Tsol	260°C/5sec	-

*1, Power dissipation and forward current are the value when the module temperature is set lower than the rating by using an adequate heat sink.

*2, Pulse width Max.10ms Duty ratio max 1/10

■ **Directivity**

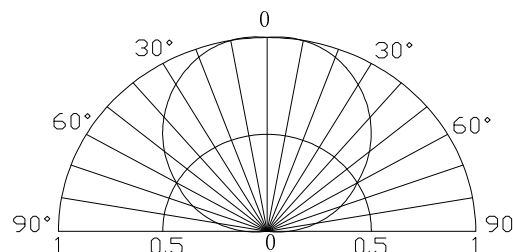

■ **Electrical -Optical Characteristics**

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V _F	I _F =600mA	9.0	10.2	11.4	V
DC Reverse Current	I _R	V _R =15V	-	-	100	μA
Luminous Flux	Φ _v	I _F =600mA	360	420	-	lm
Color Temperature	CCT	I _F =600mA	-	6500	-	K
Chromaticity Coordinates*	x	I _F =600mA	-	0.31	-	
	y	I _F =600mA	-	0.33	-	
50% Power Angle	2θ _{1/2}	I _F =600mA	-	120	-	deg

Note: Don't drive at rated current more than 5s without heat sink for High Power series.

* Tolerance of chromaticity coordinates is ±10% , * Tolerance of Luminous Flux is ±20%.

<Fig.a> Forward Current Derating Curve

