

Verbatim LED GU10 6.0W-65W D 4000K 35D 460LM

- GU10 Socket
- 220-240V
- 40,000 hours Lifetime
- Dimmable
- 89% Energy Saving
- Luminous Flux 90° Cone: 460 lm
- Equivalent to 65W incandescent bulb
- CRI \geq 90
- Flicker-free
- 5 Years Warranty

Product Number	52349
General Data	
Lamp Socket	GU10
Electric Data	
Wattage (W)	6.0
Wattage Equivalent (W)	65
Voltage (V)	220-240
Dimmable	yes
Power Factor	\geq 0.9
Operating Frequency (Hz)	50/60
Geometric Data	
Length (mm)	57
Diameter (mm)	50
Weight (g)	56
Photometric Data	
Luminous Flux (lm)	480
Luminous Flux 90° Cone (lm)	460
CRI	90
CCT (K)	4000
Luminous Intensity (cd)	1170
Beam Angle (°)	35
Luminous Efficacy (lm/W)	80
Lifetime (hrs)	40,000
Switching Cycle	100,000
Operating Temperature	-20°C to 40°C




Product image



Application image



Energy Rating

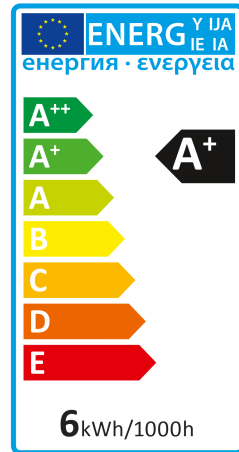

Technical Packaging Details

Barcode

023942523499

EAN 128

(02)00023942523499(37)10(91)814

EAN 14

50023942523494

Pack Dimensions(HxWxL)

67 x 51 x 51 (mm)

Pack Weight

70 (g)

MOQ

10

Carton Dimensions (HxWxL)

60 x 145 x 280 (mm)

Cartons/Pallet

221

Layers/Pallet


13

Units/Pallet

2210



Photometric Diagrams

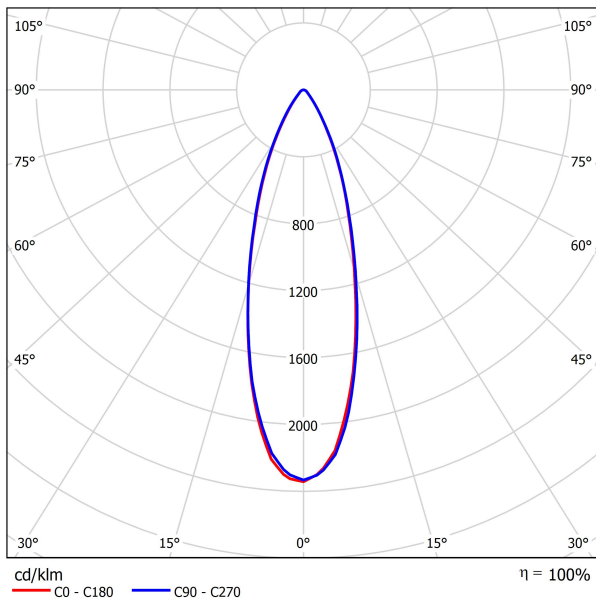

Distance [m]	Cone Diameter [m]	Beam Type	E(0°)	E(C90)	E(C0)	Half-value Angle	Units
0.5	0.28	C0 - C180	4544	2038	2060	30.2°	126, 57, 57
	0.27		15.5°	15.1°			
1.0	0.55	C90 - C270	1136	510	515	31.0°	182, 82, 82
	0.54		15.5°	15.1°			
1.5	0.83	C0 - C180	505	226	229	30.2°	126, 57, 57
	0.81		15.5°	15.1°			
2.0	1.11	C90 - C270	284	127	129	31.0°	182, 82, 82
	1.08		15.5°	15.1°			
2.5	1.39	C0 - C180	182	82	82	30.2°	126, 57, 57
	1.35		15.5°	15.1°			
3.0	1.66	C90 - C270	126	57	57	31.0°	182, 82, 82
	1.62		15.5°	15.1°			