

Verbatim LED Trumpet Downlight 170mm 15W 3000K 1500lm White

- Luminous efficacy of 100lm/W
- 50,000 hours lifetime (L85B10) / 70,000 hours lifetime (L80B10)
- Light output of 1500lm
- 3000K warm white light
- Flicker-free
- DALI option available
- UGR<19
- 5 Years Warranty




Product Number	52944
General Data	
Installation Type	Recessed
Housing material	Aluminium & PBT
Housing colour	white - RAL9003
Protection class	IP40
Dimmable	no
Geometric Data	
Height (mm)	102
Outer diameter (mm)	170
Inner diameter (mm)	155
Weight (g)	617
Electric Data	
Wattage (W)	15
Voltage (V)	220-240
Current (mA)	680
Power Factor	0.9
Operating Frequency (Hz)	50/60
Safety Class	Class III
Power supply	External
Photometric Data	
Luminous Flux (lm)	1500
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	100
Luminous Intensity (cd)	1500
Beam Angle (°)	65
UGR	19
Lifespan	
Lifetime (hrs)	70,000
Switching Cycle	100,000
Mechanical Parameters	
Glow wire test	850°C



Product image




Technical drawing

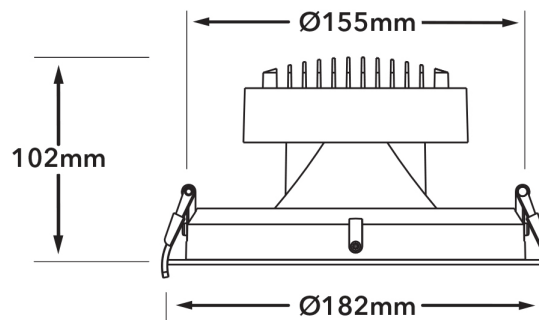

Application image



Energy Rating

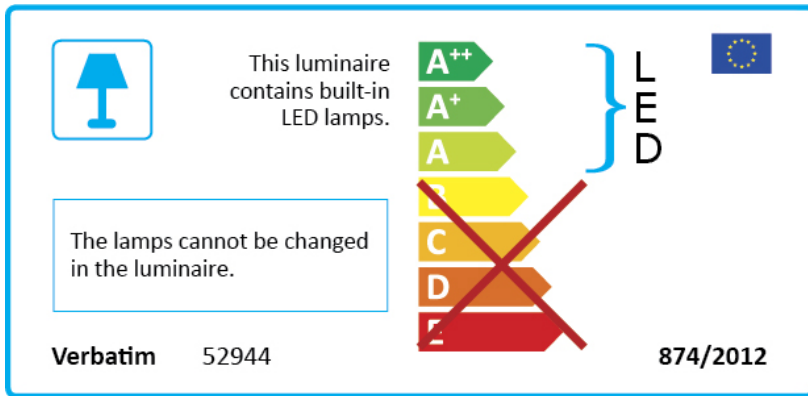

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Verbatim 52944 **874/2012**

Energy efficiency scale: A++, A+, A, B, C, D, E. A bracket groups A++ through A as 'LED'. A red 'X' is drawn over the B, C, D, and E categories.

Technical Packaging Details

EAN 128
(02)00023942529408(37)01(91)814

EAN 14
023942529408

Pack Dimensions(HxWxL)
250 x 250 x 155 (mm)

MOQ
1

Carton Dimensions (HxWxL)
1019 x 1140 x 760 (mm)

Cartons/Pallet
72

Layers/Pallet
6

Units/Pallet
72

