

Micros

Specification

Product Name: 3 LEDs SMD2835 Module with lens

Item No: OLLBZ. 0. 72W3-2835



Applications

Suitable for 8 ~12cm depth signs such as channel letters, metal letters, light boxes, decoration, etc.

Features

1. High luminous efficacy 2835 SMD LED mounted 22-24LM per LED.
2. High light effective; No light decay after working 1000Hrs; With 50000Hrs lifespan.
3. Overmolded housing design with 160 degree lens, wide beam angle, nice and upscale.
4. Aluminum PCB board, good heat dissipation.
5. Constant voltage driving.
6. Certification: CE, RoHs
7. Emitting color available: red, green, blue, yellow, Pure white, cold white, warm white.
8. Dimension: 66.8*15.8*7 mm
9. Waterproof rank: IP 65.

Installation

1. **3M** adhesive tape at back is for an installation aid only, permanent adhesion is done with screws;
2. Single module as a unit can be cut accordingly.
3. The maximum quantity connection: 40pcs.

Warranty

* 3 years warranty, 50,000H life span


Technical Parameters:

Item No.	LED Color	Color Temperature/ Wavelength	Beam Angle	Luminous Flux	Working Voltage	Power (W)
OLLBZ. 0. 72W3-2835	Cold White	10000-12000 °K	160°	66-72 Lm	12 V DC	0.72 W

Others:

CRI	Standard package	Storage Temp	Working Temp	PCB	Shell	Net Weight
> 75	20 pcs/ string	- 25~+70 °C	- 20~+60 °C	Aluminum	ABS injection	7.6 g

Profile Drawings:

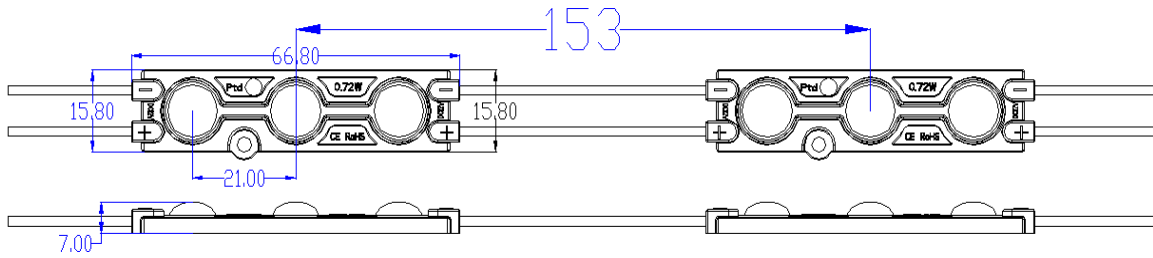

Package:

100pcs

2500pcs



1. Carton Dimension: 50.5*28*34cm= 0.048 CBM (1±10%)
2. 20 modules per string, 100 modules per bag, 2500 modules per outer carton;
3. Gross Weight (G.W): 20KG/carton (1±10%)
4. The actual packed quantity and weight subject to change without prior notice.