



YETDA INDUSTRY LTD.

5mm Blue Super Bright LED Lamps S500TBCR4H-5V

5mm with InGaN Dice with Resistor chip inside ◦

Encapsulated with Water Clear Lens Package ◦

Long Leads ◦

Absolute Maximum Ratings :

Parameter	Maximum Rating	Unit
Peak Forward Current	120	mA
Continuous Forward Current	30	mA
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-50°C to +100°C	
Lead Soldering Temperature	260°C for 3 seconds 1.6mm(0.063 inch) from body	


Electro-Optical Characteristics (Ta = 25°C)

Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage	IF = 20mA	Vf		5		V
Reverse Current	VR = 5V	Ir			10	uA
Luminous Intensity	IF = 20mA	Iv	2000		3000	mcd
Spectral Bandwidth	IF = 20mA	$\Delta\lambda$				nm
Wavelength	IF = 20mA	λ_d		470		nm
Viewing Angle	IF = 20mA	2 θ 1/2		20		deg

Please refer to CIE1931 Chromaticity Coordinate diagram

Package

Item: 500

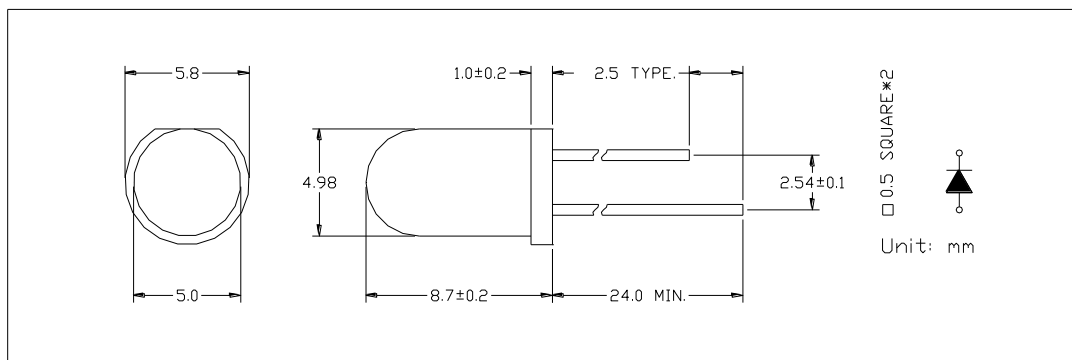

14MAR12Y