

## Verbatim LED Tube T8 G13 1500mm 23W 2950lm 4000K

- G13 Socket
- 220-240V
- 50,000 hours Lifetime
- Luminous Flux: 2950 lm
- 5 Years Warranty


<b>Product Number</b>	<b>52710</b>
<b>General Data</b>	
Lamp Socket	G13
Design	LED T8 Tube
<b>Electric Data</b>	
Wattage (W)	23
Voltage (V)	220-240
Dimmable	no
Power Factor	>0.9
Operating Frequency (Hz)	50-60
<b>Geometric Data</b>	
Length (mm)	1513
Diameter (mm)	28
Weight (g)	300
<b>Photometric Data</b>	
Luminous Flux (lm)	2950
CRI	80
CCT (K)	4000
Beam Angle (°)	130
Luminous Efficacy (lm/W)	128.26
Lifetime (hrs)	50,000
Switching Cycle	100,000
Operating Temperature	-40 - +45°C




## Product image




## Technical drawing



## Application image

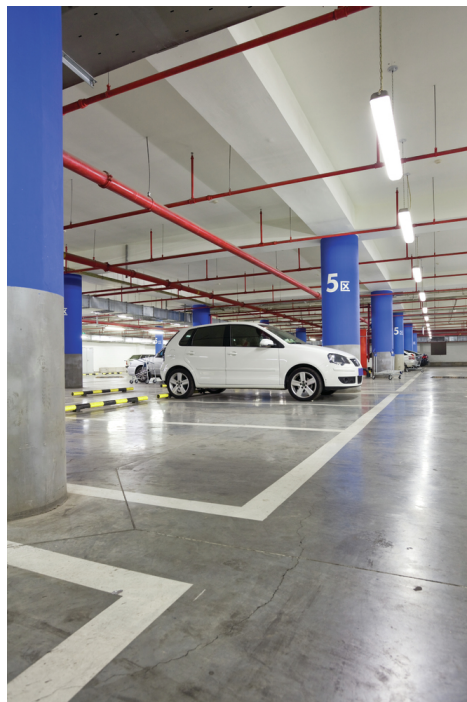

### Energy Rating

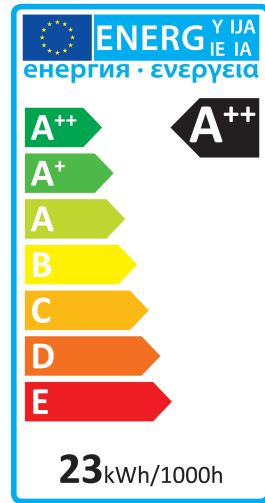

### Technical Packaging Details

**Barcode**

23942527107

**EAN 128**

(02)00023942527107(37)04(91)803

**EAN 14**

50023942527102

**Pack Dimensions(HxWxL)**

35 x 33 x 1595 (mm)

**Pack Weight**

490 (g)

**MOQ**

4

**Carton Dimensions (HxWxL)**

85 x 85 x 1625 (mm)

**Cartons/Pallet**

80

**Layers/Pallet**


10

**Units/Pallet**

320



### Photometric Diagrams

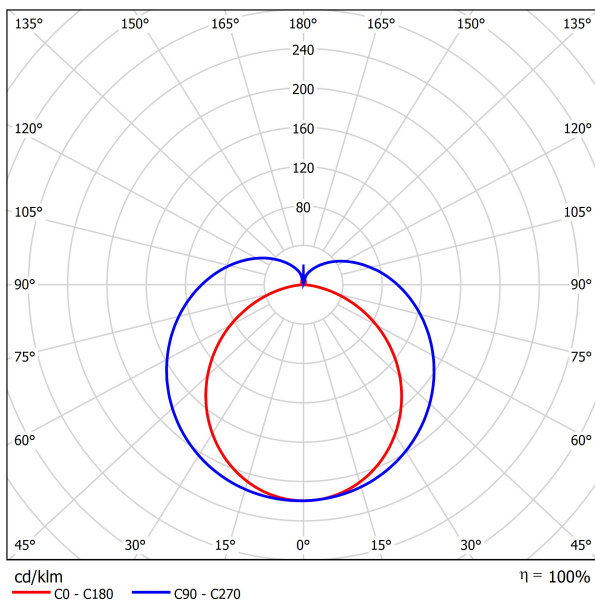

Distance [m]	Cone Diameter [m]	Beam Type	E(0°)	E(C90)	E(C0)	Beam Type	E(0°)	E(C90)	E(C0)	Beam Type	E(0°)	E(C90)	E(C0)	Beam Type	E(0°)	E(C90)	E(C0)
0.5	4.75	1.38	E(0°)	78.1°	54.0°	C0 - C180	E(0°)	78.1°	54.0°	C90 - C270	E(0°)	78.1°	54.0°	C0 - C180	2736	12	278
															12	278	
															278		
1.0	9.49	2.75	E(0°)	78.1°	54.0°	C0 - C180	E(0°)	78.1°	54.0°	C90 - C270	E(0°)	78.1°	54.0°	C0 - C180	684	3	70
															3	70	
															70		
1.5	14.24	4.13	E(0°)	78.1°	54.0°	C0 - C180	E(0°)	78.1°	54.0°	C90 - C270	E(0°)	78.1°	54.0°	C0 - C180	304	1	31
															1	31	
															31		
2.0	18.98	5.51	E(0°)	78.1°	54.0°	C0 - C180	E(0°)	78.1°	54.0°	C90 - C270	E(0°)	78.1°	54.0°	C0 - C180	171	1	17
															1	17	
															17		
2.5	23.73	6.88	E(0°)	78.1°	54.0°	C0 - C180	E(0°)	78.1°	54.0°	C90 - C270	E(0°)	78.1°	54.0°	C0 - C180	109	0	11
															0	11	
															11		
3.0	28.47	8.26	E(0°)	78.1°	54.0°	C0 - C180	E(0°)	78.1°	54.0°	C90 - C270	E(0°)	78.1°	54.0°	C0 - C180	76	0	8
															0	8	
															8		