

## Verbatim LED IP44 Ambient Dim Spotlight 10W 3000-2000K 700lm White

- Energy efficient alternative to Halogen Spotlights
- « Dim to Warm » technology
- 40.000 hours lifetime (L70)
- Light output of 700lm
- from 3000K to a warmer 2000K
- 40° beam angle
- IP44
- CRI $\geq$ 90




<b>Product Number</b>	<b>52977</b>
<b>General Data</b>	
Installation Type	Recessed
Housing material	Aluminum
Housing colour	White
Protection class	IP44
Dimmable	yes
<b>Geometric Data</b>	
Length (mm)	50
Outer diameter (mm)	78
Inner diameter (mm)	68
Weight (g)	350
<b>Electric Data</b>	
Wattage (W)	10
Voltage (V)	220-240
Current (mA)	45
Power Factor	0.95
Operating Frequency (Hz)	50-60
Safety Class	Class II
Power supply	External
<b>Photometric Data</b>	
Luminous Flux (lm)	700
CRI	92
CCT (K)	3000-2000
Luminous Efficacy (lm/W)	70
Luminous Intensity (cd)	1150
Beam Angle (°)	40
<b>Lifespan</b>	
Lifetime (hrs)	40,000
Switching Cycle	100,000
<b>Mechanical Parameters</b>	
Glow wire test	650°C



## Product image




## Technical drawing

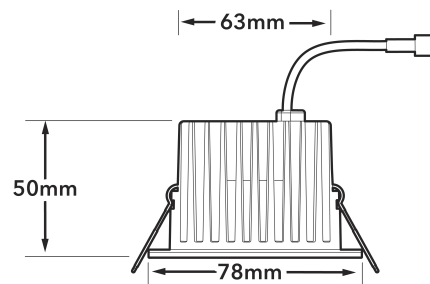


## Application image



### Energy Rating



This luminaire contains built-in LED lamps.

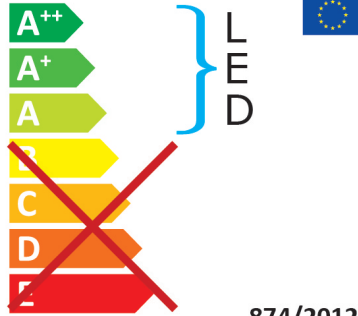

The lamps cannot be changed in the luminaire.

Verbatim 52977
874/2012

### Technical Packaging Details

<b>Barcode</b>	23942529774
<b>EAN 128</b>	(02)00023942529774(37)04(91)147
<b>EAN 14</b>	50023942529779
<b>Pack Dimensions(HxWxL)</b>	75 x 115 x 155 (mm)
<b>Pack Weight</b>	440 (g)
<b>MOQ</b>	4
<b>Carton Dimensions (HxWxL)</b>	95 x 245 x 325 (mm)
<b>Cartons/Pallet</b>	72
<b>Layers/Pallet</b>	8
<b>Units/Pallet</b>	288



### Photometric Diagrams

