






Taśma LED 230V dioda 3528

Główne parametry:




Wymiary:


Front View

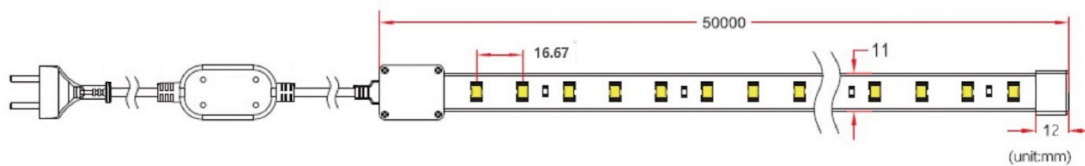


Side View

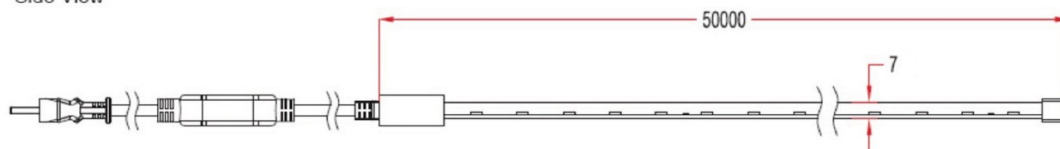


Schemat podłączenia:




Cut the strip on the position as shown




Inject adequate silicone gel into the end cap




Cover with tubes; make it fixed and dried




Cut the strip on the position as shown




Connect the strip lights as shown




Inject adequate silicone gel into the joint and make it dried



Connect the strip as shown



Put the joint strip lights into protective shell



Cover the protective shell according to instructions and fix the screws

Symbol Micros	Barwa światła	Ilość LED	Strumień świetlny	Wymiary	Kolor podłoża	M
OLTBZ300A67b230s	biała zimna (6000K)	300	2100 lm	8mm x 5m	białe tło	24W
OLTBC300A67b230s	biała ciepła (3000K)	300	2100 lm	8mm x 5m	białe tło	24W