

## Verbatim LED Tracklight 48W 4000K 4600lm Black

- Energy efficient LED track light
- Universal track adaptor (GLOBAL GA69)
- 50.000 hours lifetime (L70B50)
- 4000K neutral white light
- Light output of 4600lm
- Dimmable
- Equipped with Mitsubishi Chemical's Vx-filter

<b>Product Number</b>	<b>52463</b>
<b>General Data</b>	
Installation type	Track-mounted
Housing material	Aluminum
Housing colour	Black
Protection class	IP20
Dimmable	yes
<b>Geometric Data</b>	
Length (mm)	209
Height (mm)	197
Width (mm)	143
Weight (g)	1700
<b>Electric Data</b>	
Wattage (W)	48
Voltage (V)	220-240
Current (mA)	240
Power Factor	>0.9
Operating Frequency (Hz)	50-60
Safety Class	I
Power supply	Integrated
<b>Photometric Data</b>	
Luminous Flux (lm)	4600
CRI	80
CCT (K)	4000
Luminous Efficacy (lm/W)	95.83
Luminous Intensity (cd)	8200
Beam Angle (°)	40
<b>Lifespan</b>	
Lifetime (hrs)	50,000 (L70B50)
Switching Cycle	100,000
<b>Mechanical Parameters</b>	
Glow wire test	850°C




## Product image



## Application image



### Energy Rating

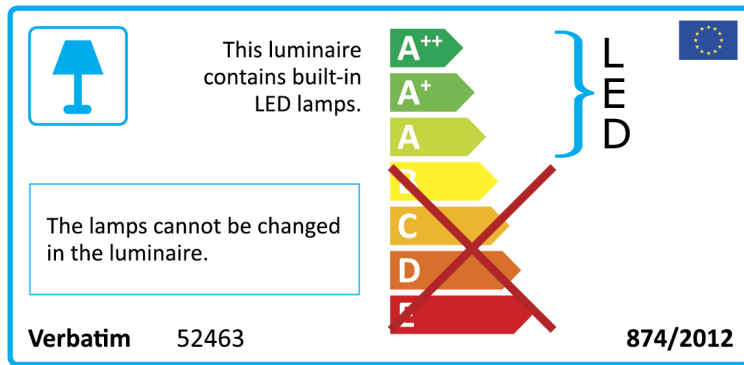

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**A++**  
**A+**  
**A**  
~~**B**~~  
~~**C**~~  
~~**D**~~  
~~**E**~~

LED

Verbatim 52463 874/2012

### Technical Packaging Details

<b>Barcode</b>	023942524571
<b>EAN 128</b>	(02)00023942524571(37)04(91)817
<b>EAN 14</b>	50023942524576
<b>Pack Dimensions(HxWxL)</b>	???(mm)
<b>Pack Weight</b>	2000 (g)
<b>MOQ</b>	1
<b>Carton Dimensions (HxWxL)</b>	166 x 259 x 295 (mm)
<b>Cartons/Pallet</b>	40
<b>Layers/Pallet</b>	5
<b>Units/Pallet</b>	40

