

Introduction

The flexible light strip uses high-brightness 5050 SMD LEDs.With its flexible shape it can be molded into any configuration and is perfect for decorative lighting,cove lighting and architectural lighting.


Applications

- Architectural decorative lighting, archway, canopy and bridge edge lighting
- Show case,cabinet,cove lighting, bench,backlight


Benefits


- Continuous length flexible LED light strips
- Long life-time with minimum maintenance required
- Colors available: red,green,blue.amber,pink,RGB color-changing,white.
- Runs on 12v systems like solar cell charged batteries
- 120-degree wide angle illumination
- Vibration proof/waterproof (optional) and retains stable performance in tough environment

Demension(mm):

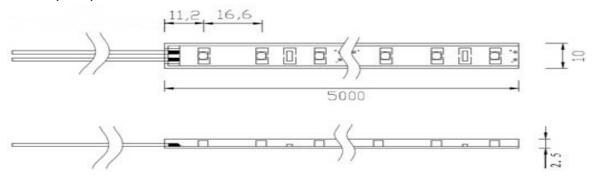

Specification





| Model | Color | Wavelen | Len | LED | Light Output | Light | Beam | Voltage | Current | Max. Power |
|------------|-------|---------|------|------|--------------|---------|-----------|---------|---------|-------------|
| Number | | gth(nm) | gth(| Q'ty | (mcd) | Output | Angle | (V DC) | (A) | Consumption |
| | | | m) | | | (lumen) | (degrees) | | | (W) |
| Red | | 620-625 | 5 | 300 | 300x1800 | 1800 | 120 | 12 | 6 | 72 |
| Yellow | | 585-590 | 5 | 300 | 300x1800 | 1800 | 120 | 12 | 6 | 72 |
| Blue | | 460-465 | 5 | 300 | 300x820 | 1500 | 120 | 12 | 6 | 72 |
| Green | | 520-525 | 5 | 300 | 300x3300 | 2200 | 120 | 12 | 6 | 72 |
| Cold White | | 6000K | 5 | 300 | 300x5000 | 5100 | 120 | 12 | 6 | 72 |
| Warm White | | 3000K | 5 | 300 | 300x3900 | 4950 | 120 | 12 | 6 | 72 |

Waterproofing Grade:



1P20: Non-waterproof, cann't touch water during usage

1P65: Silicon glue with coated, surface can touch water-drops during usage

1P68: Silicon tube with silicon glue inside, can totally put into water

Packing details:

• Sticked with 3M tape

• Packed in 5meters/reel & each reel packed in anti-static bag

• Weight: IP20: 0.14kg/reel; IP65: 0.26kg/reel; IP68: 0.46kg/reel.