
Kingbright

3x3mm SQUARE TOP LED LAMP

L-714GDT

GREEN

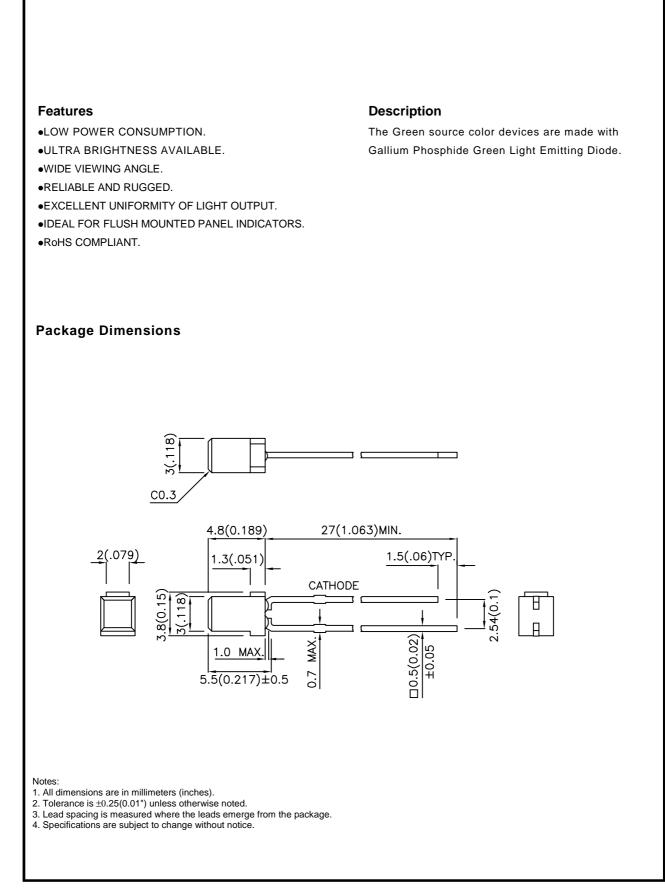

SPEC NO .: DSAE2706

REV NO.: V.3

APPROVED: J. Lu

DATE: MAR/23/2005 DRAWN: S.M.TANG

Kingbright

Selection Guide									
Part No.	Dice	Lens Type	lv (mcd) @ 10mA		Viewing Angle				
			Min.	Тур.	2 0 1/2				
L-714GDT	GREEN (GaP)	GREEN DIFFUSED	1	5	110°				

Note:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	Vr = 5V

Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2] 260°C For 3 Seconds				
Lead Solder Temperature [3] 260°C For 5 Seconds				


Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

3. 5mm below package base.

Kingbright

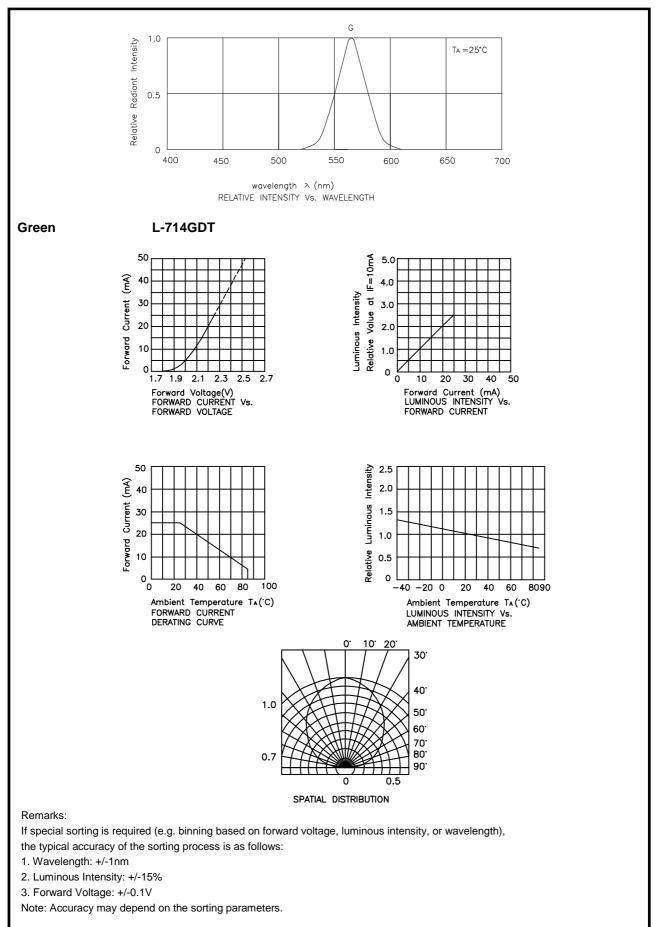

SPEC NO .: DSAE2706

APPROVED: J. Lu

REV NO.: V.3

CHECKED: Allen Liu

DATE: MAR/23/2005 DRAWN: S.M.TANG