


# 18FF- 4Z- C7

# RELAY SOCKET

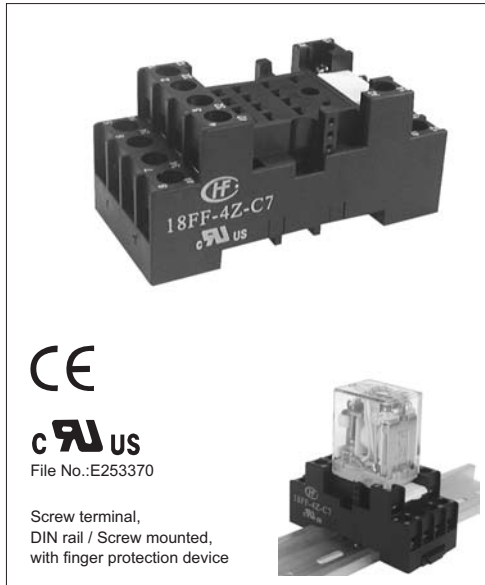

CE

cULus  
File No.:E253370

Screw terminal,  
DIN rail / Screw mounted,  
with finger protection device

## CHARACTERISTICS



Ambient temperature :	-40 °C to 70°C
Rated voltage:	300VAC
Rated current :	12A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PA66+GF V0 (UL)
Contacts spring material :	QSn6.5-0.1
Retainer :	non-available
White plastic tag :	available
Modules :	non-available
Terminal torque :	0.6Nm
Wire strip length :	7mm

Applicable relay type: HF18FF (4 poles)

## DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM


Unit: mm

### Outline Dimensions

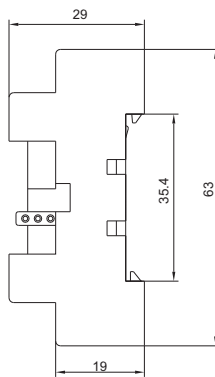


(Top View)

### Wiring Diagram



(Top View)

### PCB Layout



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2008 Rev. 1.00