


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/30/06'	~	LJC 03/30/06'
B	整理图纸	YCH 10/18/10'	~	

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
 - PART NUMBER: DS1004
 - PRODUCT NUMBER CODE:
DS1004 - X X X


CONTACT TYPE
1: TYPE 1 3: TYPE 3
2: TYPE 2 4: TYPE 4

CONTACT PLATING
F1: Full GOLD FLASH


No.OF CONTACTS
1*1 - 1*40
2*1 - 2*40

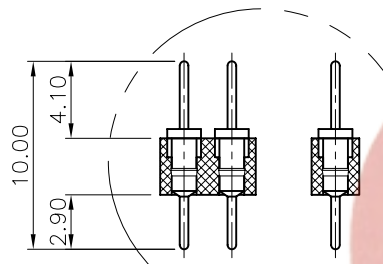


TYPE 1

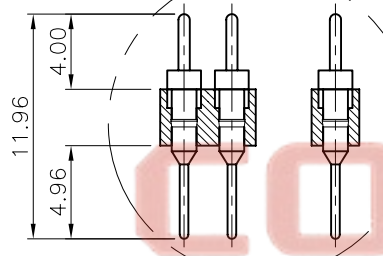





TYPE 2

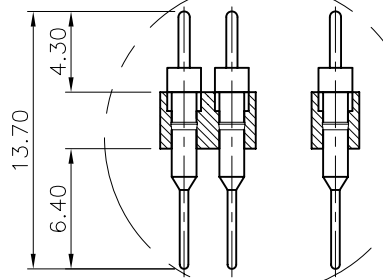


TYPE 3

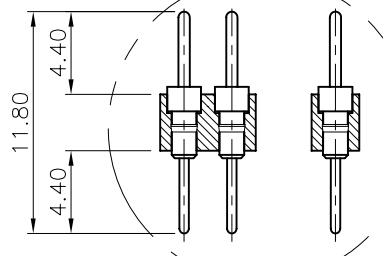

TYPE 4

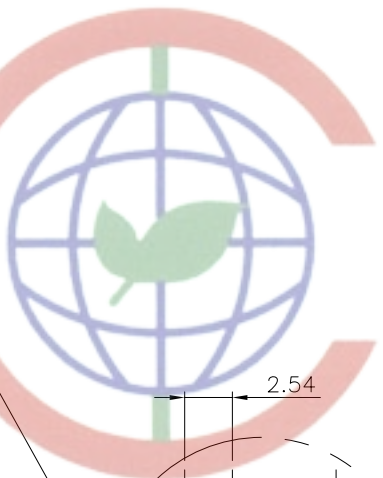


DUAL ROW SINGLE ROW



RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

TYPE1/2/3/4 DIA. (TOLERANCE=±0.05)

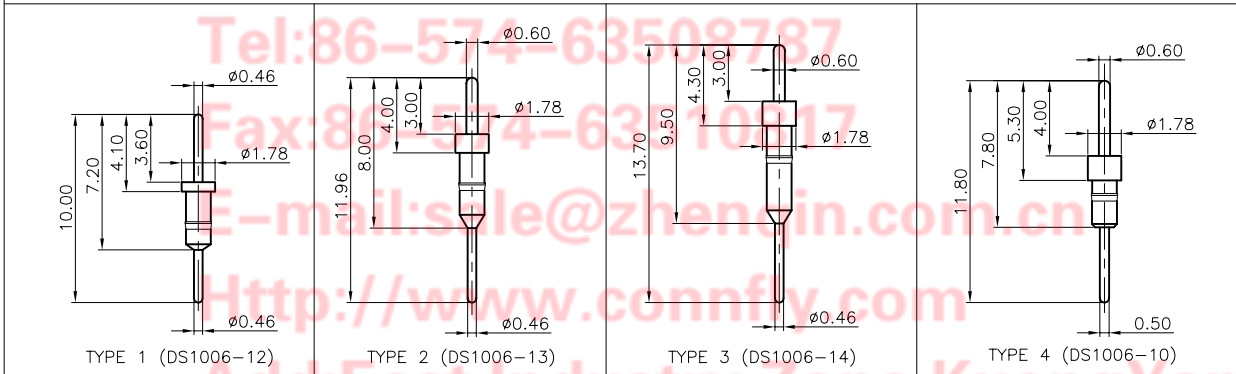

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	mm		DIP STRIP ADAPTER PITCH 2.54mm	
.X	±0.38	.X	±3°	A4		SERIES DS1004 SERIES	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1 SHEET 10F1					
DRAWING NO.		C-DS1004-XXX					