
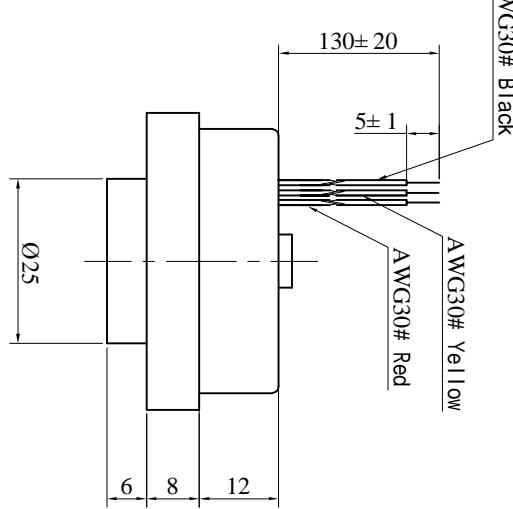


SPECIFICATION

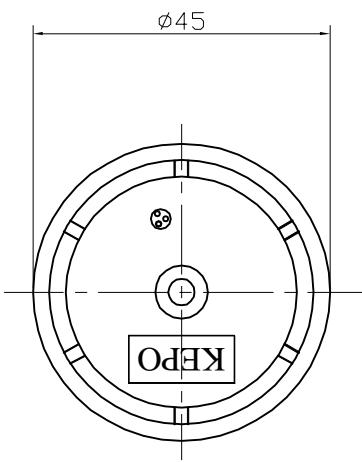

- | | |
|---------------------------------|-------------------------|
| 1.Rated Voltage | 12VDC. |
| 2.Operating Voltage | 3~16VDC. |
| 3.Max.Rated Current | 35(20)mA at 12VDC |
| 4.Min.Sound Pressure Level..... | 100(92)dB at 12VDC/30cm |
| 5.Tone Nature | Continuous+Slow Pulse |
| 6.Resonant Frequency | 3.2 ± 0.5 kHz. |
| 7.Shell Material/Color..... | ABS/White |
| 8.Operating Temperature | -20~+60°C. |
| 9.Store Temperature | -30~+70°C. |
| 10.Weight | 21g. |
| 11.Remark: | |

Compliance with ROHS						
KEPO ELECTRONIC CO., LTD http://www.chinacoustic.com			Piezo Buzzer KPI-G4513L			
No.	DESCRIPTION	APPROVED	DATE	APPROVALS		
				DRAWN	UNIT mm	DWG NO. KP3.840.065R
1	NOTED OTHERWISE X = XXX = 90° FORMED ANGLES ANGLES < 90°	CHECKED	06.03.21	SCALE	NOT TO SCALE	SHEET 1/1
2	FIRST ANGLE PROJECTION	APPROVED				VER 1.0