HOW TO ORDER

=Raised Actuator — R=Recessed Actuator





NDI -

Positions: 01-10, 12

FEATURES

Low profile for space savingGold contact for high reliability**Top tape type for washing process

APPLICATION

※Industrial control

*Automatic machines control

Package: Tube

□=Regular T=Top Tape Sealed <Recessed Actuator Only>

S=Splay H=Straight


RoHS & Lead Free Solderable

*Telecommunication

SPECIFICATION

Contact Rating	25mA, 24V DC		
Contact Resistance	50mΩ max.		
Insulation Resistance	100MΩ min. 500V DC		
Dielectric Strength	500V AC/1 minute		
Operating Force	1,000gf max.		
Travel	1mm		
Operating Life	2, 000 cycles		
Operating Temp.	-20°C ~ +85°C		
Storage Temp.	-40°C ~ +85°C		

CIRCUIT





PACKAGE


<Tube>

1 UDG
NDI(R)-01: 130 pcs
NDI(R)-02: 76 pcs
NDI(R)-03: 55 pcs
NDI(R)-04: 42 pcs
NDI(R)-05: 35 pcs
NDI(R)-06: 28 pcs
NDI(R)-07: 25 pcs
NDI(R)-08: 22 pcs
NDI(R)-09: 20 pcs
NDI(R)-10: 18 pcs
NDI(R)-12: 15 pcs


NDI(R)



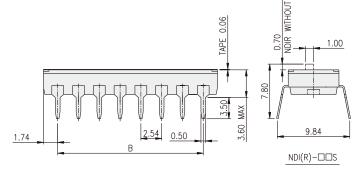



PART NO.	NO.OF POS.	DIM.A	DIM.B
NDI(R)-01	1	3.48	
NDI(R)-02	2	6.02	2.54
NDI(R)-03	3	8.56	5.08
NDI(R)-04	4	11.10	7.62
NDI(R)-05	5	13.64	10.16
NDI(R)-06	6	16.18	12.70
NDI(R)-07	7	18.72	15.24
NDI(R)-08	8	21.26	17.78
NDI(R)-09	9	23.80	20.32
NDI(R)-10	10	26.34	22.86
NDI(R)-12	12	31.42	27.94



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diptronics:

NDIR-03H-T-V
NDIR-04H-T-V
NDI-05H-V
NDI-03S-V
NDIR-09S-T-V
NDIR-06S-T-V
NDI-03H-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDI-09S-V
NDIR-08H-V
NDIR-08H-V
NDIR-08H-V
NDIR-08H-V
NDIR-02S-T-V
NDIR-12B-V
NDIR-05H-T-V
<th